


Bundle Dia.: X
Min.LOOP: Y

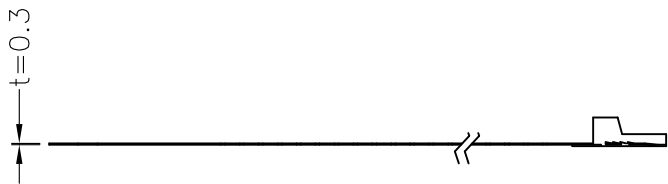

PART NO.	(X) Max. Bundle Dia. mm(in)	L mm(in)	W mm(in)	(Y) Min.LOOP Tensile Strength kgs.(lbs)
STL-150S	22(0.86")	150(5.90")	7.0(0.28")	113.4(250)
STL-195S	45(1.70")	195(8.00")	7.0(0.28")	113.4(250)

以下請參考目錄