


REVISIONS			
REV	DESCRIPTION	DATE	BY

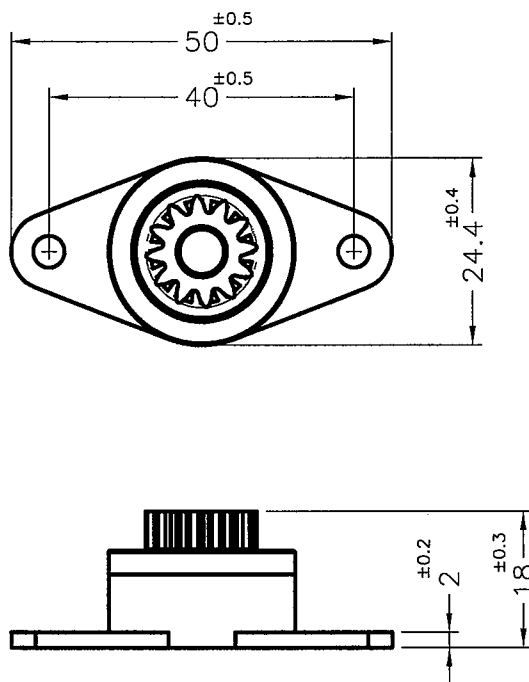

NOTE:1. MODULUS(模數): 1.0

2. PITCH DIAMETER(節圓直徑): $\phi 12$

3. NUMBER OF TEETH(齒數): 12

4. PRESSURE ANGLE(壓力角): 20°

5. TORQUE(扭力): 230 gf/cm

6. PLACE IN ROOM TEMPERATURE, THE TORQUE AT 20rpm/min SHALL BE WITHIN UPPER TABLE.
標準室溫底下, 20轉/分鐘 扭力須符合上表.

7. SPECIAL COMMENTS(特別條件)

7-1 " ROOM TEMPERATURE " IN THIS DRAWING MEANS THE SAME DEFINED.
(TEMPERATURE: $23 \pm 2^{\circ}$ C, RELATIVE HUMIDITY: $50 \pm 10\%$)

圖面上指的室溫為 $23 \pm 2^{\circ}$ C, 濕度 $50 \pm 10\%$

7-2 TORQUE WILL BE CHANGED BY TEMPERATURE AND RPM.

扭力會隨溫度及轉速而有所差異.

8. THE COLOR BATCH TEST REPORT IS ONLY FOR TEST PURPOSE.

色母環保檢測報告, 僅提供原始測試報告.

9. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE DAMPER GEAR		SPEC. DWG.		
				BODY MATERIAL/COLOR ABS UL94HB/BLACK		DATE 2008.02.01		
				GEAR MATERIAL/COLOR POM/BLACK		DRAWN JOHNNY		
				AXIS MATERIAL/COLOR PP/NATURAL		CHECK 		
PART NUMBER DP010A		DRAWING NUMBER DP010A		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 		
SIZE A4	SCALE 1:1	UNIT mm	REV C					