
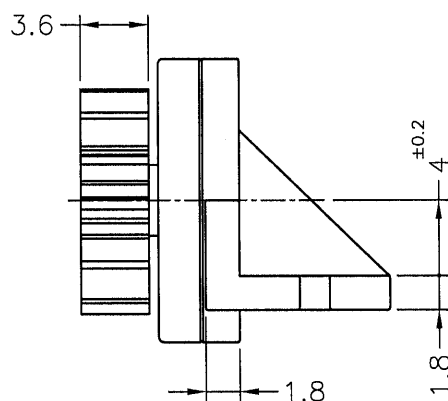
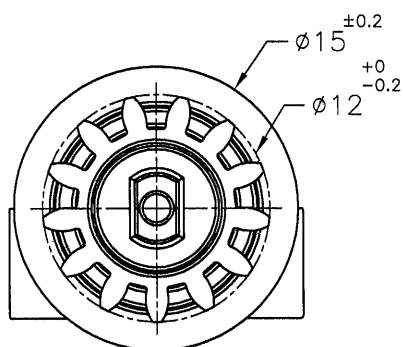
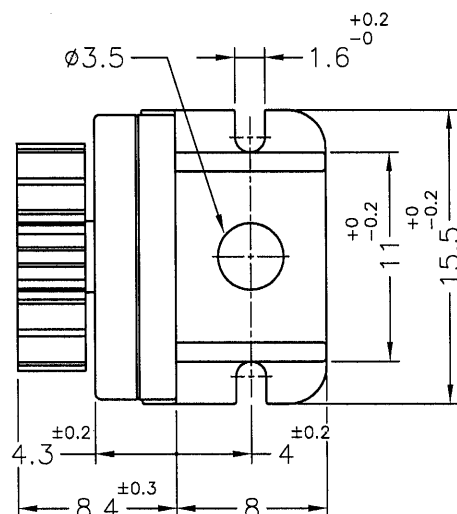


DIM.	TOL
$L \leq 6$	± 0.25
$6 < L \leq 18$	± 0.35
$18 < L \leq 30$	± 0.45
$30 < L \leq 50$	± 0.6
$50 < L \leq 80$	± 0.75

REVISIONS			
REV	DESCRIPTION	DATE	BY

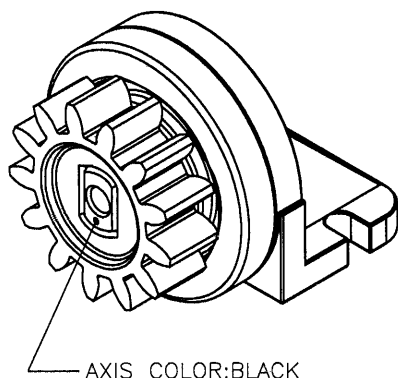

NOTE: 1. MODULUS(模數): 0.8

2. PITCH DIAMETER(節圓直徑): $\phi 10.4$

3. NUMBER OF TEETH(齒數): 13

4. PRESSURE ANGLE(壓力角): 14.5°

5. TORQUE(扭力): SEE ABOVE(見上表)

6. PLACE IN ROOM TEMPERATURE, THE TORQUE AT 20rpm/min SHALL BE WITHIN UPPER TABLE.

標準室溫底下, 20轉/分鐘 扭力須符合上表.

7. SPECIAL COMMENTS(特別條件)

7-1 "ROOM TEMPERATURE" IN THIS DRAWING MEANS THE SAME DEFINED.

(TEMPERATURE: $23 \pm 2^\circ \text{C}$, RELATIVE HUMIDITY: $50 \pm 10\%$)

圖面上指的室溫為 $23 \pm 2^\circ \text{C}$, 濕度 $50 \pm 10\%$

7-2 TORQUE WILL BE CHANGED BY TEMPERATURE AND RPM.

扭力會隨溫度及轉速而有所差異.

8. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質

PART NO.	TORQUE(扭力)	AXIS COLOR
DP025A(45)	$4.41 \pm 0.99 \text{ mN.m}$	BLACK



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

PART NUMBER SEE ABOVE		DRAWING NUMBER DP025A		TITLE DAMPER GEAR		SPEC. DWG.	
SIZE A4		SCALE 2.5:1		BODY MATERIAL ABS UL94HB		DATE 2015.05.12	
UNIT mm		REV B		GEAR MATERIAL POM UL94HB		DRAWN K.W	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		AXIS MATERIAL/COLOR PA66 UL94V-2/SEE ABOVE		CHECK Kenny		APPROVED Kang	