

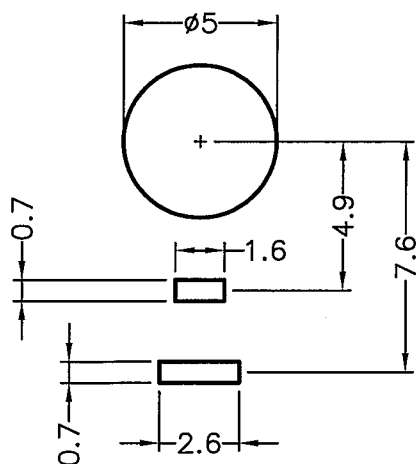


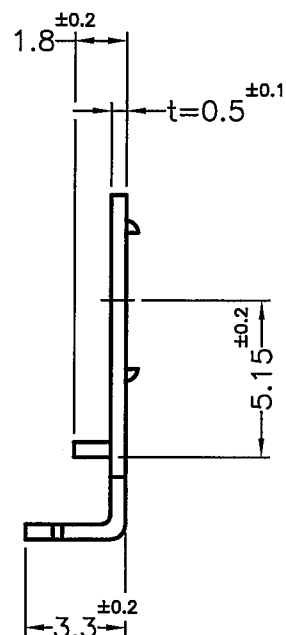

MOUNTING HOLE

NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起3個月內。
 2. FINISH: TIN PLATED.
 IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封。

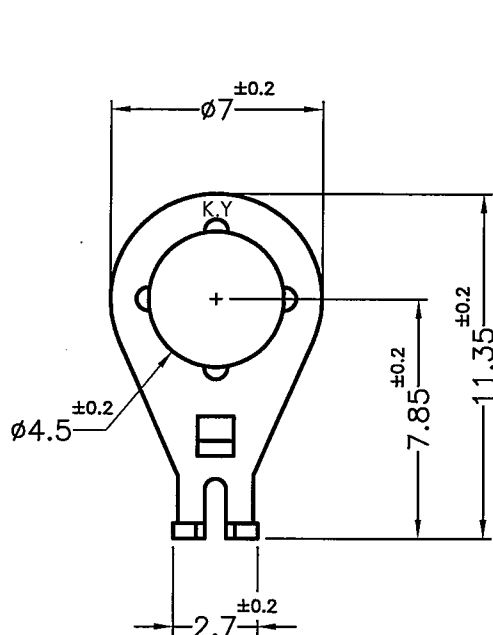

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.

DATE
 2015.12.09
 DRAWN
 T.C
 CHECKED
 林祺翔
 APPROVED
 Kang

TITLE
 GROUND TERMINAL
 MATERIAL
 BRASS
 COLOR
 FINISH
 TIN PLATED
 UNLESS OTHERWISE SPECIFIED
 TOLERANCE:
 SEE ABOVE

DWG. NO.
 GND-99
 SIZE
 A4
 SCALE: 4:1

PART NO.
 GND-99
 SPEC. DWG
 UNIT
 mm
 REV
 A
 SHEET 1 OF 1

DO NOT SCALE DRAWING