


WITH HALOGEN
有鹵料件



- NOTE: 1. Current Rating : 1 Amp, Max.
2. Contact Resistance : 30M Ohm Max
3. Insulation Resistance : 1000M Ohm Min
4. Operating Temperatures : -40°C to +85°C
5. Contact Plated : Gold Flash on Contact Area
Ni Plating Overall .

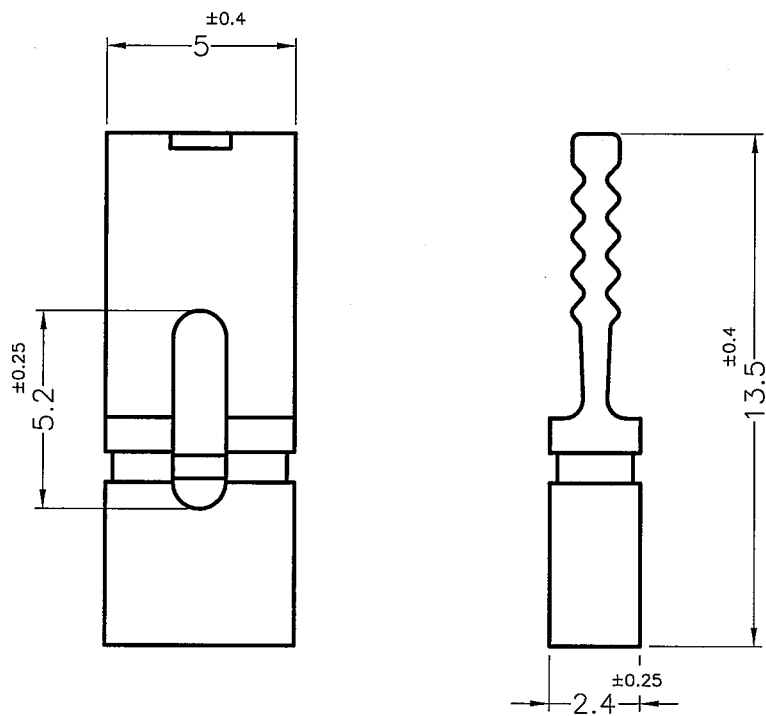

康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE 1998.12.14	TITLE PITCH 2.54mm MINI JUMP		DWG. NO. MINI-2		PART NO. MINI-2(BK)	
	DRAWN Jason	MATERIAL NYLON 66 UL94V-0		SIZE A4		REV D	
	CHECKED 李柏宥	COLOR BLACK	TERMINAL MATERIAL BRASS	SPEC. DWG			
	APPROVED Kang	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SCALE: 5:1	UNIT mm	SHEET 1 OF 1	

DO NOT SCALE DRAWING