
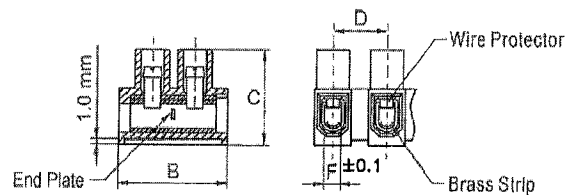




REVISIONS			
REV	DESCRIPTION	DATE	BY

Product safety certification through the following.

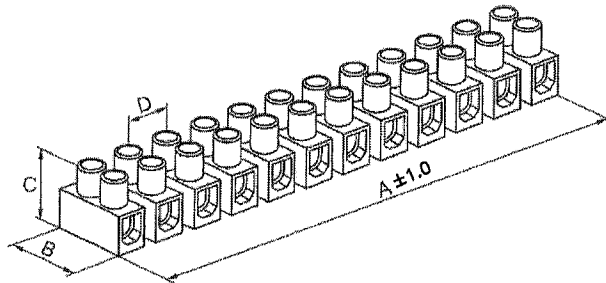

NOTE: 1. Cutted face can't be very smooth, due to by hand-cutting.
2. Working tempture : 110°C.

PART NO.	A ^{±1.0}	B	C	D	E	F ^{±0.1}	Wire Range		Screw
							Cross-Sec	AWG.Cu	
PA7-1	6.4 ^{±1.0}	17.0	14.5	8.2	2.9	2.8 ^{±0.1}	1.5mm ²	#22-#12 Sol/Str	M2.6X5mm ^{MIN.}
PA7-2	14.6 ^{±1.0}								
PA7-3	22.8 ^{±1.0}								
PA7-4	31.0 ^{±1.0}								
PA7-5	39.2 ^{±1.0}								
PA7-6	47.4 ^{±1.0}								
PA7-7	55.6 ^{±1.0}								
PA7-8	63.8 ^{±1.0}								
PA7-9	72.0 ^{±1.0}								
PA7-10	80.2 ^{±1.0}								
PA7-11	88.4 ^{±1.0}								
PA7-12	96.6 ^{±1.0}								

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE TERMINAL BLOCK		TITLE SPEC. DWG	
				HOUSING MAT'L / COLOR NYLON 66 UL94V-2/NATURAL		DATE 2006.12.01	
				END PLATE MAT'L SUS with Nickel plated brass.		DRAWN BUNNY	
				WIRE PROTECTOR MAT'L SUS		CHECK 	
PART NUMBER SEE ABOVE		DRAWING NUMBER PA7-H		SCREW MAT'L Zinc-plated Steel		APPROVED 	
SIZE A4	SCALE NONE	UNIT mm	REV B	UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.5			