


DIM.	TOL
0~100mm	±1.0
100mm UP	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY



PRODUCT SAFETY CERTIFICATION
THROUGH THE FOLLOWING.

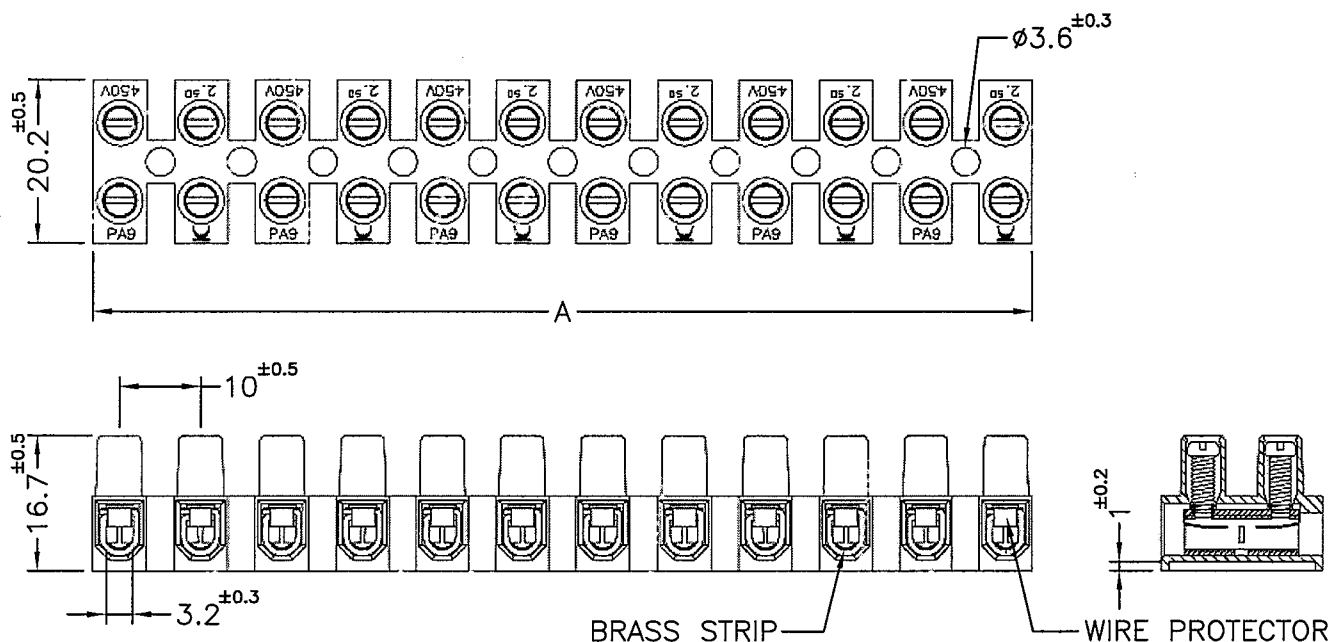

PART NO.	A
PA9-1DS	6.6
PA9-2DS	16.6
PA9-3DS	26.6
PA9-4DS	36.6
PA9-5DS	46.6
PA9-6DS	56.6
PA9-7DS	66.6
PA9-8DS	76.6
PA9-9DS	86.6
PA9-10DS	96.6
PA9-11DS	106.6
PA9-12DS	116.8

- NOTE: 1. CUTTED FACE WILL BE A BIT BULGED, CAN'T BE VERY SMOOTH, DUE TO BY HAND-CUTTING.
 2. WORKING TEMPTURE : 110°C .
 3. SCREWS : M3X6 .
 4. VOLTAGE : 600V(UL), 450V(VDE).
 5. CURRENT : 30A(UL), 24A(VDE).
 6. WIRE RANGE : 1.0~2.5mm², #22~#12 Sol./Str.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE TERMINAL BLOCK		SPEC. DWG.	
				HOUSING MAT'L / COLOR NYLON 66 UL94V-2/NATURAL		DATE 2006.12.04	
PART NUMBER SEE ABOVE				TERMINAL MAT'L / FINISH STEEL/ZINC PLATED		DRAWN BUNNY	
DRAWING NUMBER PA9-DSH				SCREW MAT'L / FINISH STEEL/ZINC PLATED		CHECK 林祺翔	
SIZE A4				SCALE NONE		UNIT mm	
REV C				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED Kang	