





REVISIONS			
REV	DESCRIPTION	DATE	BY

PRODUCT SAFETY CERTIFICATION THROUGH
THE FOLLOWING.

產品安全規範認證

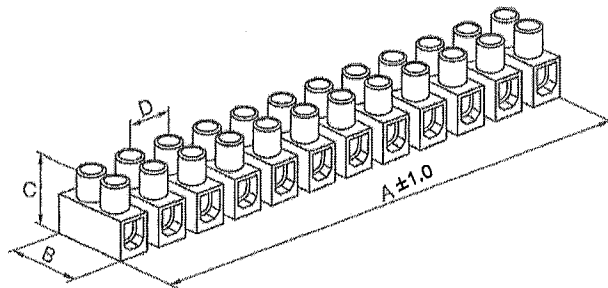

NOTE: 1. CUTTED FACE CAN'T BE VERY SMOOTH, DUE TO BY HAND-CUTTING.

此產品手工裁切, 切斷面不平整為正常現象.

2. WORKING TEMPTURE : 110°C .

工作溫度110度 .

PART NO.	A ± 1.0	B	C	D	E	F	WIRE RANGE 適用電線		SCREW 螺絲
							CROSS-SEC	AWG.CU	
PA9-1	6.8 ± 1.0	20.2	16.7	10.0	3.6	3.2	2.5mm ²	#22-#12 Sol/Str	M3X6mm ^{MIN.}
PA9-2	16.8 ± 1.0								
PA9-3	26.8 ± 1.0								
PA9-4	36.8 ± 1.0								
PA9-5	46.8 ± 1.0								
PA9-6	56.8 ± 1.0								
PA9-7	66.8 ± 1.0								
PA9-8	76.8 ± 1.0								
PA9-9	86.8 ± 1.0								
PA9-10	96.8 ± 1.0								
PA9-11	106.8 ± 1.0								
PA9-12	116.8 ± 1.0								



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE TERMINAL BLOCK		SPEC. DWG	
HOUSING MAT'L / COLOR NYLON 66 UL94V-2/NATURAL		DATE 2006.12.04	
END PLATE MAT'L SUS WITH NICKEL PLATED BRASS		DRAWN BUNNY	
WIRE PROTECTOR MAT'L SUS	SCREW MAT'L ZINC-PLATED STEEL	CHECK 	
UNLESS OTHERWISE SPECIFIED TOLERANCE ± 0.5		APPROVED 	

PART NUMBER SEE ABOVE		DRAWING NUMBER PA9-H	
SIZE A4	SCALE NONE	UNIT mm	REV B