

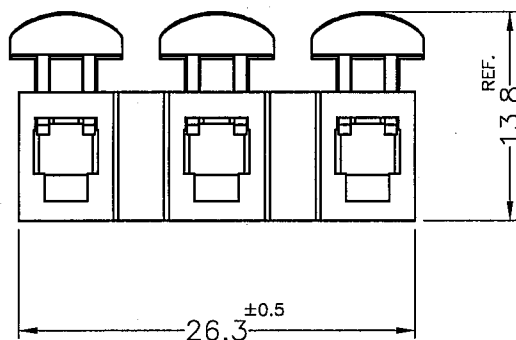


WITH HALOGEN 有鹵料件

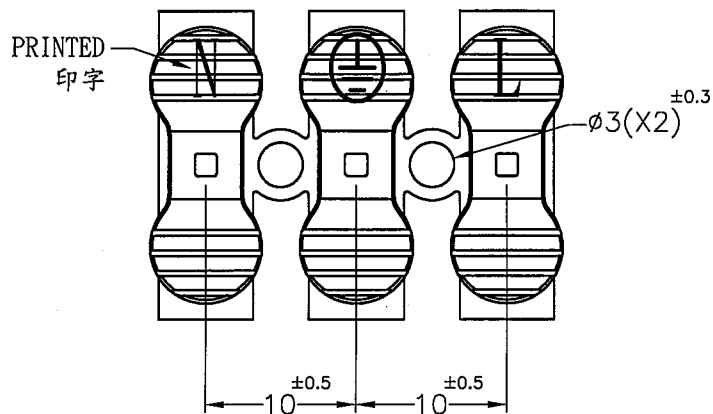

電器規格 & 適用電線 RATINGS & WIRE RANGE	安規認證 APPROVALS
10A, 250V, 85°C 0.5~2.5mm ²	CE CQC

NOTE: 1. NOMINAL TEMP: 85°C

額定溫度: 85°C

2. THE WIRE OF THIS PRODUCT IS NOT RESISTANT TO TENSION.

此產品電線不抗拉



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2021.10.01

DRAWN
Terry

CHECKED
Yuping

APPROVED
ck

TITLE
PUSH-BUTTON TERMINAL BLOCKS

MATERIAL
PP

COLOR
WHITE

FINISH

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.

PA93

PART NO.

PA93

SIZE
A4

SPEC. DWG.

REV
A

SCALE: 2:1

UNIT mm

SHEET 1 OF 1