

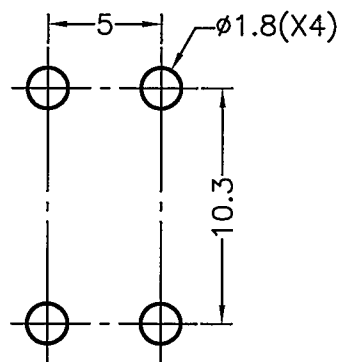



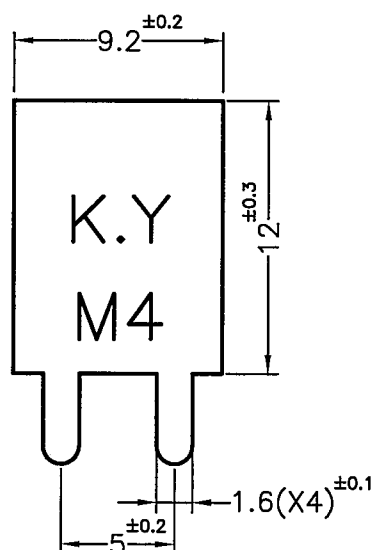

MOUNTING HOLE

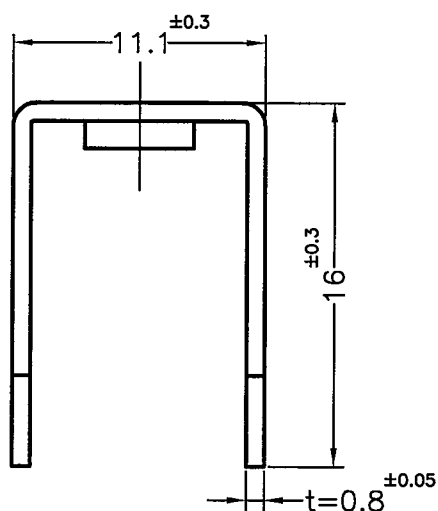

NOTE:1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間,為製造日起3個月內.

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫,未使用完畢時,產品請密封.

3. LOAD CURRENT: 15A.

負載電流值15A.



ISO 9001
ISO 14001
QC 080000
IATF 16949

康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN)CO.,LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE	TITLE		DWG. NO.		PART NO.	
	2008.07.10	P.C.B TERMINAL		PCB-27		PCB-27(M4)	
	DRAWN	MATERIAL		PCB-27		PCB-27(M4)	
	SAI	BRASS					
	CHECKED		COLOR	FINISH	SIZE	SPEC. DWG.	REV
APPROVED		UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		A4	C		
DO NOT SCALE DRAWING				SCALE: 3:1	UNIT	mm	SHEET 1 OF 1