



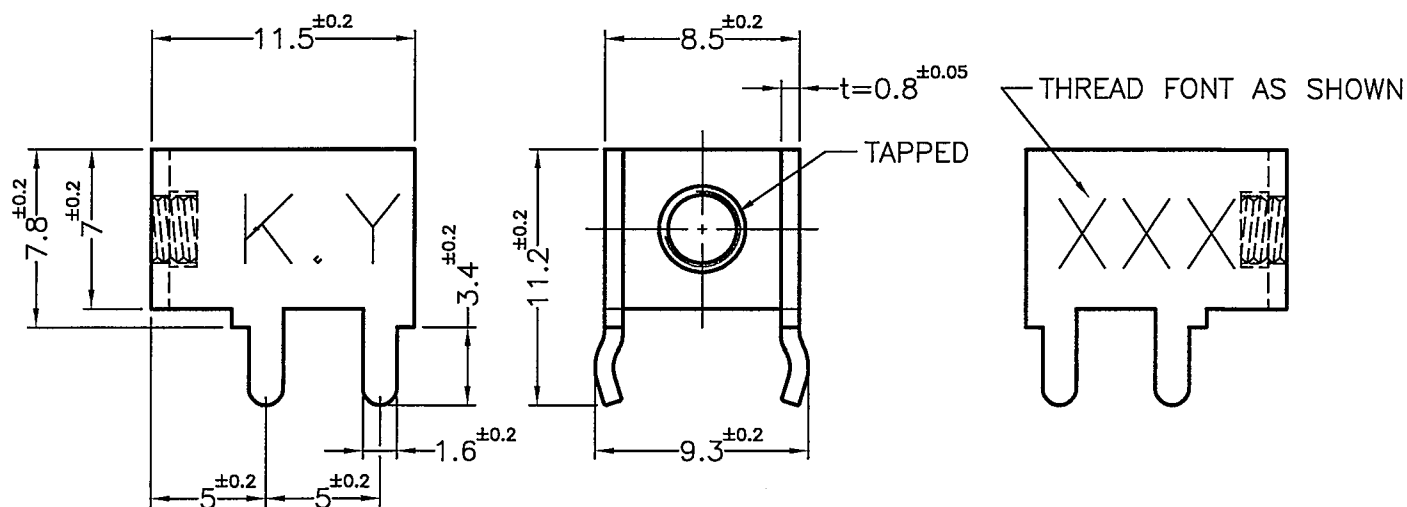

PART NO.	TAPPED	THREAD FONT
PCB-2	M3x0.5P	M3
PCB-2(M4)	M4x0.7P	M4
PCB-2(6-32)	UNC6-32	632

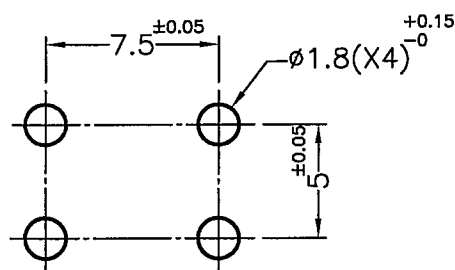

MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間, 為製造日起3個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫, 未使用完畢時, 產品請密封。
 3. LOAD CURRENT: 15A.
 負載電流值15A.



康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2002.07.23
DRAWN
JASON
CHECKED
林祺翔
APPROVED
Kang

TITLE
P.C.B TERMINAL
MATERIAL
BRASS
COLOR
FINISH
TIN PLATED
UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.
PCB-2H
SIZE
A4

PART NO.
SEE ABOVE
SPEC. DWG.
REV
D

SCALE: 3:1 UNIT mm SHEET 1 OF 1