
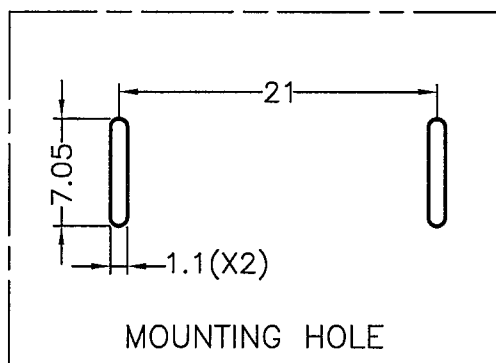

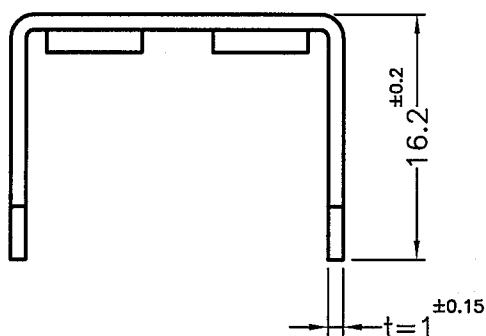


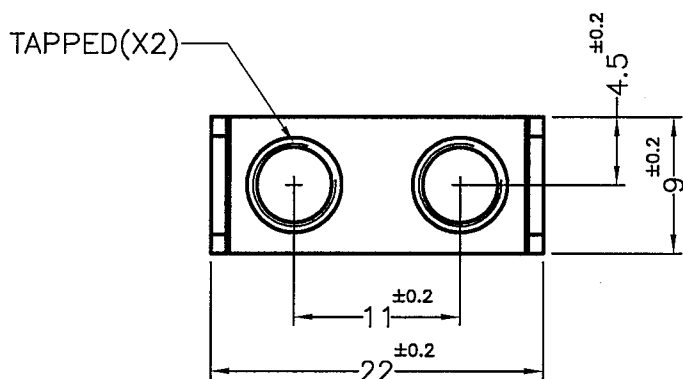

PART NO.	TAPPED	FINISH
PCB-36(M4)	M4	TIN PLATED
PCB-36	M5	TIN PLATED
PCB-36NI		NI PLATED

NOTE:1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起3個月內。

2. THE BEST USE TIME FOR NICKEL PLATED PARTS ARE WITHIN 6 MONTHS SINCE MFG DATE.

鍍鎳最佳使用時間，為製造日起6個月內。

3. FINISH: NICKEL PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍鎳，未使用完畢時，產品請密封。

4. LOAD CURRENT: 25A.

負載電流值25A.



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN)CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2009.12.07

DRAWN
Eric

CHECKED

APPROVED

TITLE
P.C.B TERMINAL

MATERIAL
PHOSPHOR BRONZE

COLOR
FINISH
SEE ABOVE

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.

PCB-36

PART NO.

SEE ABOVE

SIZE
A4

SPEC. DWG

REV
C

SCALE: 2:1

UNIT
mm

SHEET 1 OF 1