

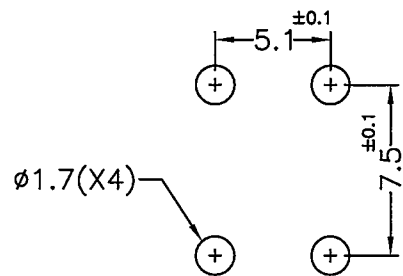



REVISIONS			
REV	DESCRIPTION	DATE	BY

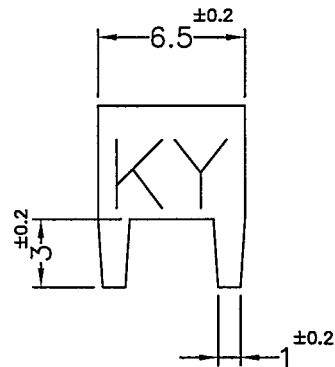

MOUNTING HOLE

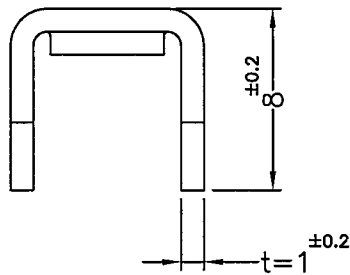

PART NO.	FINISH
PCB-37M4	TIN PLATED
PCB-37M4NI	NICKEL PLATED

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起 3 個月內。
 2. THE BEST USE TIME OF NICKEL PLATING PARTS ARE WITHIN 6 MONTHS SINCE MFG DATE.
 鍍鎳最佳使用時間，為製造日起 6 個月內。
 3. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封。
 4. FINISH: NICKEL PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍鎳，未使用完畢時，產品請密封。
 3. SUGGEST RATED CURRENT: 15A
 建議額定電流: 15A

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE P. C. B TERMINAL		SPEC. DWG.	
				MATERIAL BRASS		DATE 2010.02.22	
				FINISH SEE ABOVE		DRAWN Eric	
				COLOR		CHECK 林祺翔	
PART NUMBER SEE ABOVE		DRAWING NUMBER PCB-37M4		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
SIZE A4	SCALE 3:1	UNIT mm	REV B				