
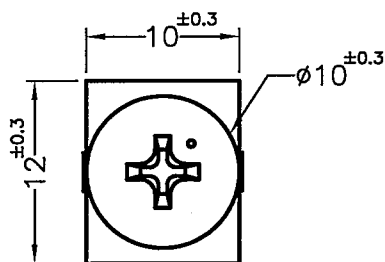
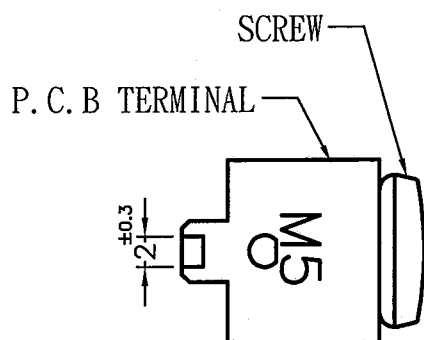


MOUNTING HOLE
THICKNESS 1.6

NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE
WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起3個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP
PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. LOAD CURRENT: 30A.

負載電流值30A.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2011.05.11

DRAWN
SAI

CHECKED
林漢翔

APPROVED

TITLE
P.C.B TERMINAL

TERMINAL MATERIAL
BRASS

TERMINAL FINISH
TIN PLATED

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.

PCB-50M5F

SIZE
A4

SCALE: 2:1

PART NO.

PCB-50M5F

SPEC. DWG.

REV
A

UNIT
mm

SHEET 1 OF 1