


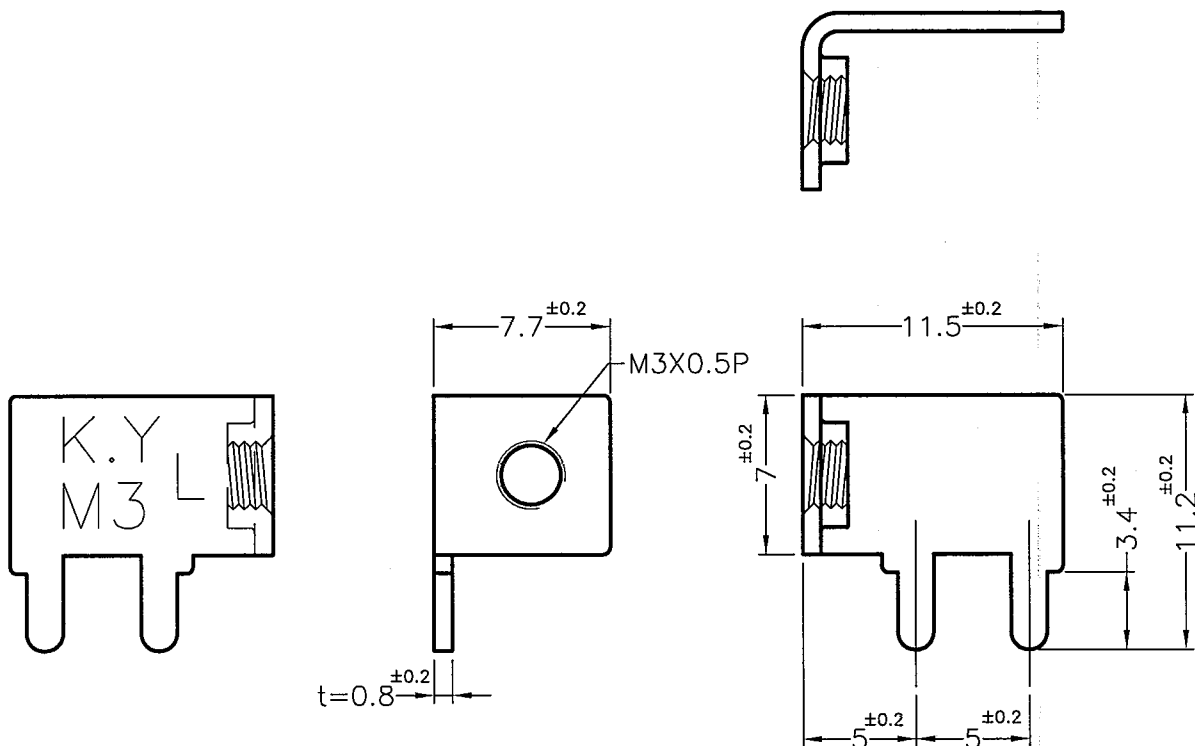

PART NO.	FINISH
PCB-54L(M3)	TIN PLATED
PCB-54L(M3)NI	NI PLATED

NOTE: 1. BEST USE DATE FOR TIN PLATED PARTS ARE WITHIN THREE MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起3個月內。

2. THE BEST USE TIME FOR NICKEL PLATED PARTS ARE WITHIN 6 MONTHS SINCE MFG DATE.

鍍鎳最佳使用時間，為製造日起6個月內。

3. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

未使用完畢時，產品請密封。

4. LOAD CURRENT: 15A.

負載電流值15A.



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN)CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2011.11.30

DRAWN
SAI

CHECKED

APPROVED

TITLE
P.C.B TERMINAL

MATERIAL
BRASS

COLOR
FINISH
SEE ABOVE

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.
PCB-54L(M3)

SIZE
A4

SCALE: 3:1

PART NO.
SEE ABOVE

SPEC. DWG

REV
B

UNIT mm

SHEET 1 OF 1