
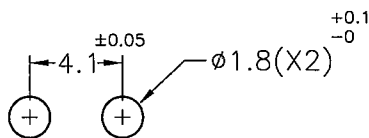
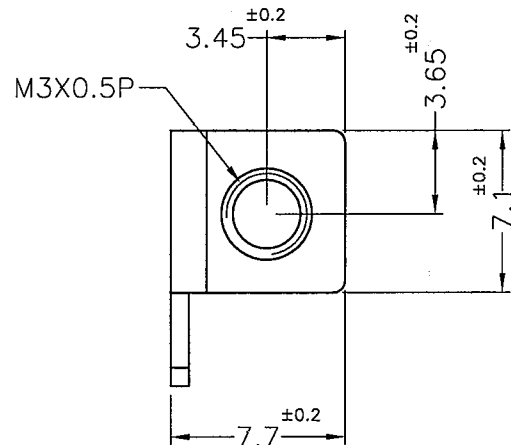
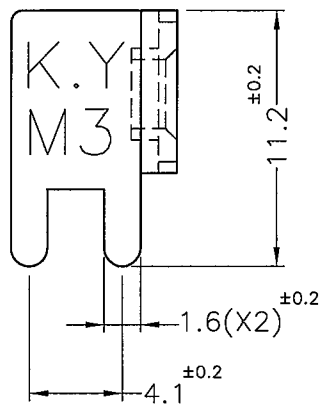



REVISIONS			
REV	DESCRIPTION	DATE	BY



MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起3個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封。
 3. FINISH: MATTE TIN PLATED OVER NICKEL BASE.
 表面處理：鎳底霧錫。

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE P. C. B TERMINAL		SPEC. DWG.	
				MATERIAL BRASS	DATE 2011.12.07		
				FINISH SEE ABOVE	DRAWN T.C		
				COLOR	CHECK 		
PART NUMBER PCB-55(M3)		DRAWING NUMBER PCB-55(M3)		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE			
SIZE A4	SCALE 3:1	UNIT mm	REV A	APPROVED 