

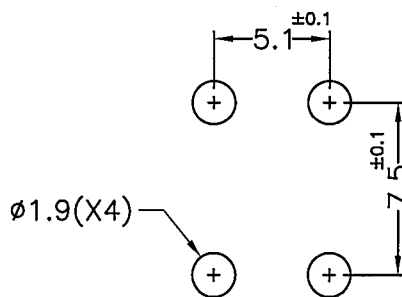



REV	REVISIONS	DATE	BY
	DESCRIPTION		

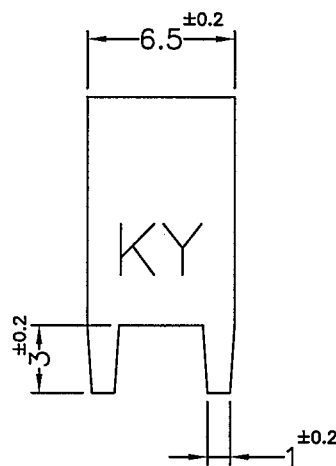

MOUNTING HOLE

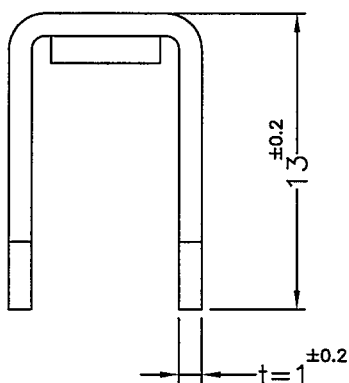

PART NO.	FINISH
PCB-58M4	TIN PLATED
PCB-58M4NI	NICKEL PLATED

NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日起 3 個月內。

2. THE BEST USE TIME OF NICKEL PLATING PARTS ARE WITHIN 6 MONTHS SINCE MFG DATE.

鍍鎳最佳使用時間，為製造日起 6 個月內。

3. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.


表面為鍍錫，未使用完畢時，產品請密封。

4. FINISH: NICKEL PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍鎳，未使用完畢時，產品請密封。

3. SUGGEST RATED CURRENT: 15A

建議額定電流: 15A

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE P. C. B TERMINAL		SPEC. DWG.	
				MATERIAL BRASS		DATE 2008.09.03	
				FINISH SEE ABOVE		DRAWN SAI	
				COLOR		CHECK 	
PART NUMBER SEE ABOVE		DRAWING NUMBER PCB-58M4		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
SIZE A4	SCALE 3:1	UNIT mm	REV B				