

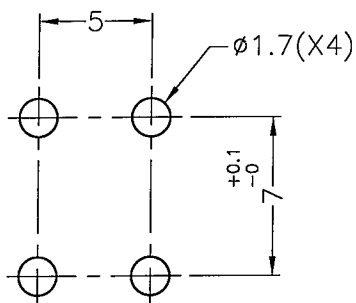



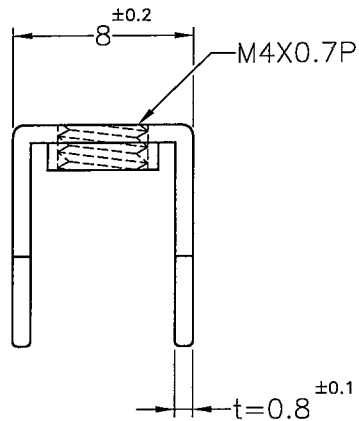

MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫, 未使用完畢時, 產品請密封。

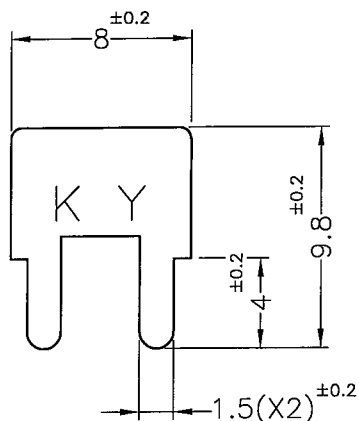

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN
 THIS DRAWING IS THE SOLE PROPERTY
 OF KANG YANG HARDWARE
 ENTERPRISE CO. ANY
 REPRODUCTION IN PART OR AS A
 WHOLE WITHOUT THE WRITTEN
 PERMISSION OF
 KANG YANG HARDWARE ENTERPRISE
 CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
 2014.01.23

DRAWN
 Y.C.P

CHECKED
 李柏賓

APPROVED
 Kang

TITLE
 P.C.B TERMINAL

MATERIAL
 BRASS

COLOR
 FINISH
 TIN PLATED

UNLESS OTHERWISE SPECIFIED
 TOLERANCE: SEE ABOVE

DWG. NO.
 PCB-66

SIZE
 A4

SCALE: 3:1

PART NO.
 PCB-66(M4)

SPEC. DWG

REV
 A

UNIT
 mm

SHEET 1 OF 1