


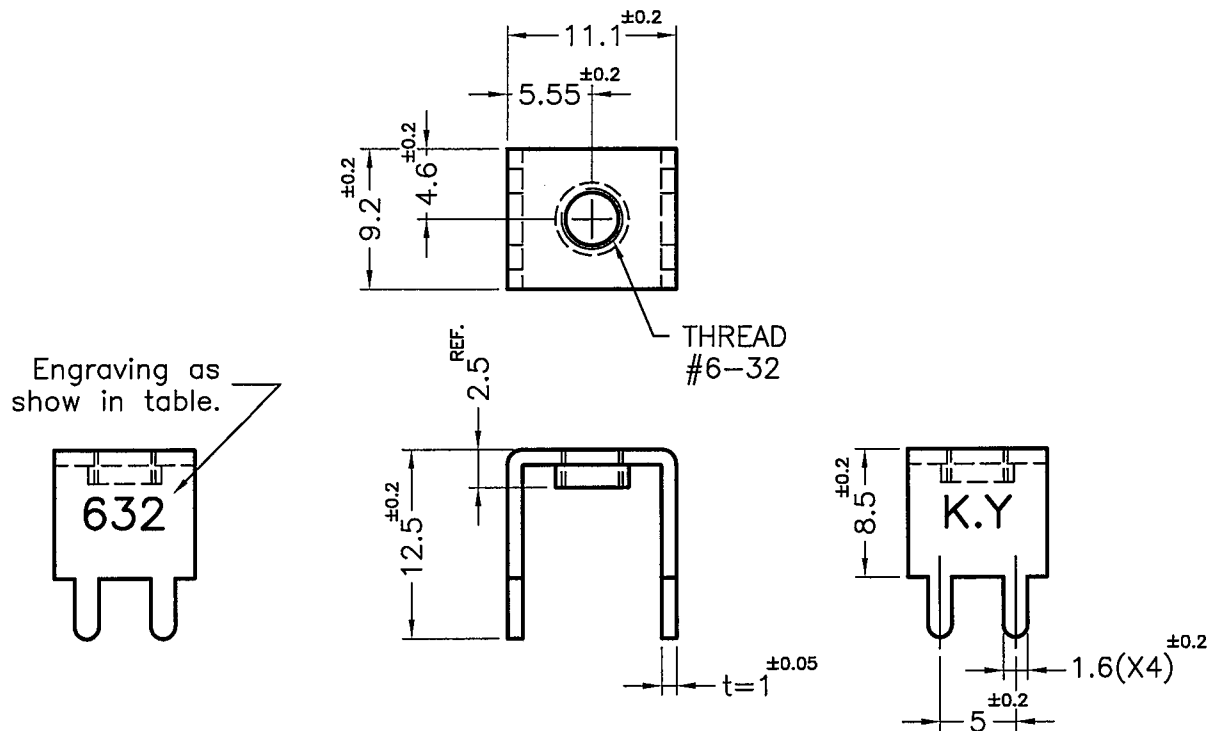

NOTE:1. BEST USE DATE FOR TIN PLATED PARTS ARE WITHIN THREE MONTHS SINCE MFG DATE.


鍍錫最佳使用時間，為製造日期三個月內。

2. THE SURFACE IS NICKEL OR TIN PLATED. WHEN NOT USED, PLEASE SEAL THE PRODUCT.

表面為鍍鎳或錫，未使用完畢時，產品請密封。

3. LOAD CURRENT: 20A.

負載電流值20A.

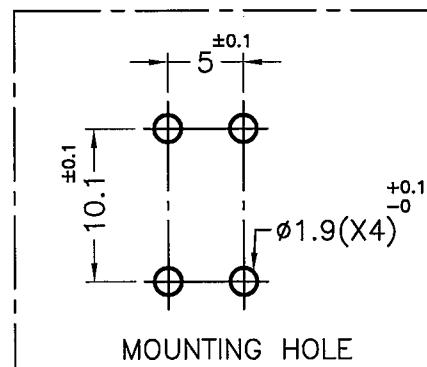

康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2001.03.23

DRAWN
JASON

CHECKED
林祺翔

APPROVED

TITLE
P.C.B TERMINAL

MATERIAL
BRASS

COLOR
FINISH
TIN PLATED

UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.
PCB-7(632)

PART NO.
PCB-7(632)

SIZE
A4

SPEC. DWG.

REV
A

SCALE: 2:1

UNIT mm

SHEET 1 OF 1