



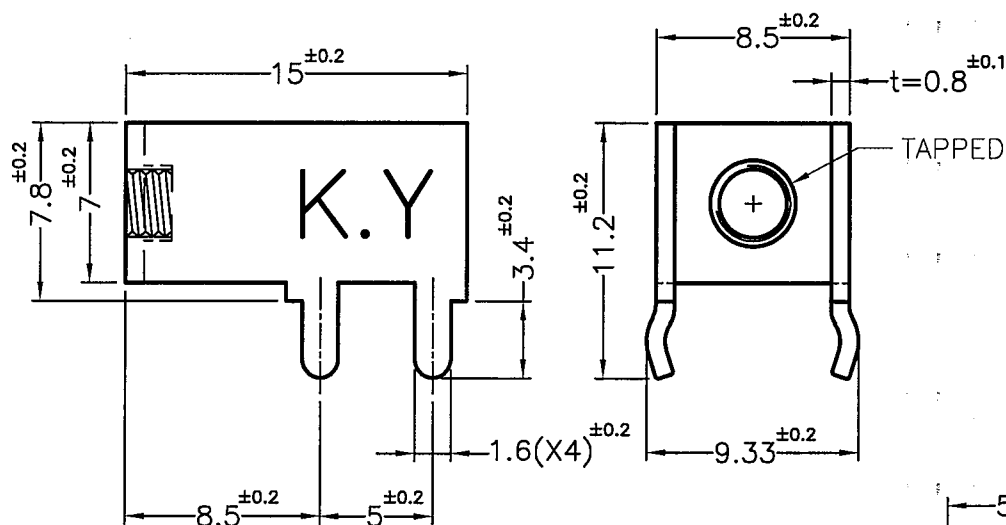

PART NO.	THREAD
PCB-78	M3x0.5P
PCB-78(M4)	M4x0.7P

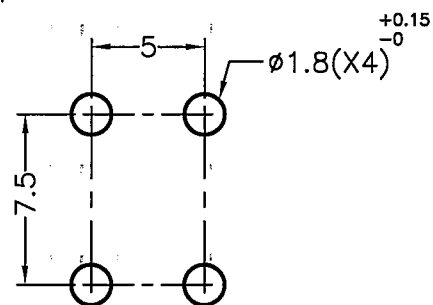

MOUNTING HOLES

NOTE: 1. BEST USE DATE FOR TIN PLATED PARTS ARE WITHIN THREE MONTHS SINCE MFG DATE.

鍍錫最佳使用時間，為製造日期 3 個月內。

2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.

表面為鍍錫，未使用完畢時，產品請密封。

3. LOAD CURRENT: 15A

負載電流值：15A



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE	TITLE	DWG. NO.	PART NO.
	2015.05.11	P.C.B TERMINAL	PCB-78	SEE ABOVE
	DRAWN	MATERIAL	SIZE	SPEC. DWG.
	LUKE	BRASS	A4	REV B
DO NOT SCALE DRAWING	CHECKED	COLOR	FINISH	SCALE: 3:1
	林祺翔		TIN PLATED	UNIT mm
APPROVED	Kang	UNLESS OTHERWISE SPECIFIED		SHEET 1 OF 1
		TOLERANCE: SEE ABOVE		