


REVISIONS			
REV	DESCRIPTION	DATE	BY

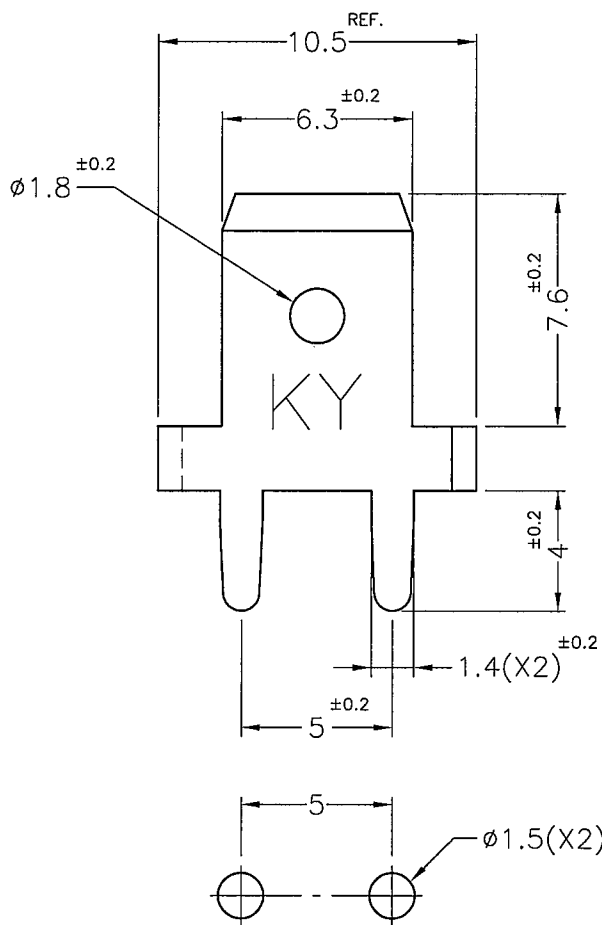

MOUNTING HOLE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
 鍍錫最佳使用時間，為製造日起 3 個月內。
 2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
 表面為鍍錫，未使用完畢時，產品請密封。
 3. SUGGEST RATED CURRENT: 15A.
 建議額定電流: 15A.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE P. C. B TERMINAL		SPEC. DWG.	
				MATERIAL BRASS		DATE 2003.05.07	
				FINISH TIN PLATED		DRAWN S.J.C.	
				COLOR		CHECK 林祺翔	
PART NUMBER PCR250-S		DRAWING NUMBER PCR250-S		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED Kang	
SIZE A4	SCALE 4:1	UNIT mm	REV A				