

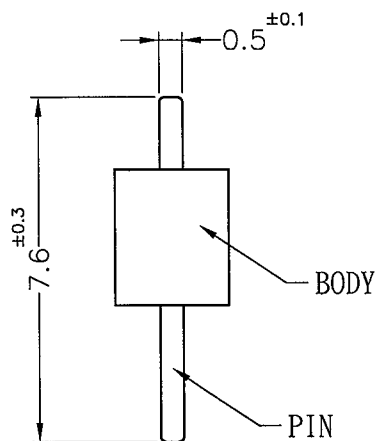
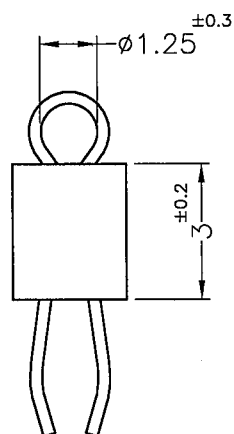




MOUNTING HOLE: $\phi 1.0$
(RECOMMEND FOR REFERENCE ONLY)

PART NO.	COLOR
TEST-129(B)	BLACK
TEST-129(W)	WHITE

- NOTE: 1. THE BEST USE TIME OF TIN PLATING PARTS ARE WITHIN 3 MONTHS SINCE MFG DATE.
鍍錫最佳使用時間，為製造日起3個月內。
2. FINISH: TIN PLATED. IF PARTS ARE NOT USED UP PLEASE STORE IN A SEAL BAG.
表面為鍍錫，未使用完畢時，產品請密封。
3. MADE OF EQUIVALENT MATERIAL.
均可使用同等材質。
4. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.
色母環保檢測報告，僅提供原始測試報告。



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

康揚塑膠五金(泰國)有限公司
บริษัท ตั้ง หยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด
KANG YANG HARDWARE (THAILAND) CO., LTD.
康揚越南有限公司
CÔNG TY TNHH KANG YANG VIỆT NAM
KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	TITLE	DWG. NO.		PART NO.	
	2014.06.04	TEST PIN	TEST-129		SEE ABOVE	
	DRAWN	BODY MAT / COLOR				
	LUKE	PBT UL94V-0+GF / SEE ABOVE				
	CHECKED	PIN MAT / FINISH	SIZE	SPEC. DWG	REV	
	PHOSPHOR BRONZE / TIN PLATED	A4	B			
APPROVED	UNLESS OTHERWISE SPECIFIED					
	TOLERANCE: SEE ABOVE					
		SCALE: 6:1	UNIT	mm	SHEET 1 OF 1	