


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

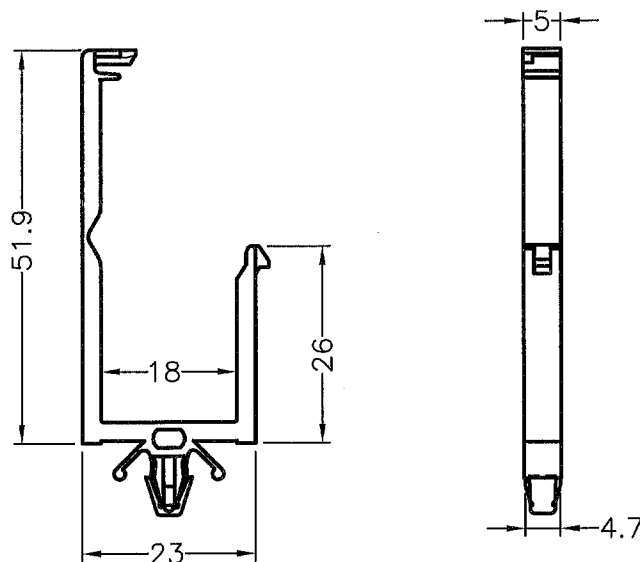

MOUNTING HOLE: $\phi 4.8$
CHASSIS THICKNESS: 0.5~2.0

PART NO.	COLOR
CHM-20	BLACK
CHM-20(N)	NATURAL

Component - Plastics

E41938

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 59715, WILMINGTON DE 19880

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)

Polyamide 66 (PA66), "Zytel", furnished as pellets.

Color	Min. Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (kV/yr): 0

Dimensional Stability (%): -

Inclined Plane Tracking (RPTI): -

Volume Resistivity (10° ohm-cm): 14

High Volt, Low Current Arc Resis (D485): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers; (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "CRA" for Orlon or "RYN" for Rynite or "ETPV" for ETPV grades.


re - Virgin and regrid up to 60% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regrid exceeding 20% is limited to V-2 Flammability for WT, RD, BK.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the combustibility of the combination is determined by UL.

Report Date: 1998-07-23
Last Revised: 2010-07-27

© 2011 DuPont Performance Plastics Inc.

CALUS

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE		SPEC. DWG.	
				WIRE SADDLE			
PART NUMBER				MATERIAL		DATE	
SEE ABOVE				NYLON 66 UL94V-2		2008.11.03	
DRAWING NUMBER				FINISH		DRAWN	
CHM-20						Tony	
SIZE				COLOR		CHECK	
A4				SEE ABOVE			
SCALE				UNLESS OTHERWISE SPECIFIED TOLERANCE		APPROVED	
1:1				SEE ABOVE			
UNIT				REV			
mm				B			