


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

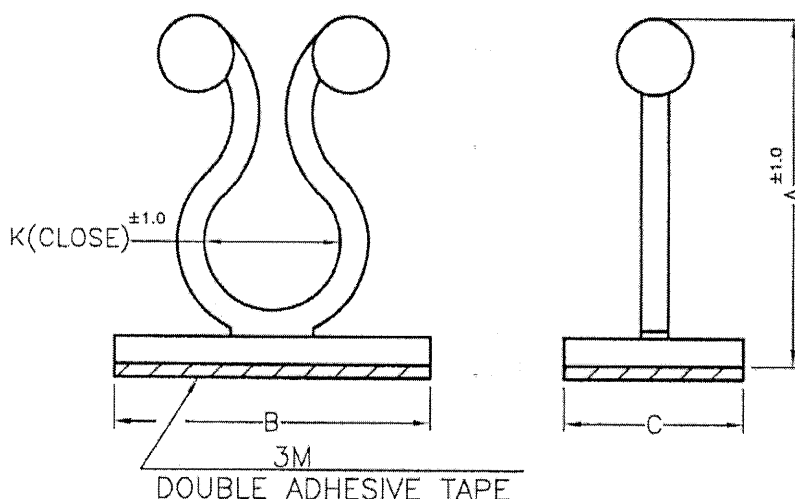

PART NO.	A	B	C	CLOSE K	DOUBLE ADHESIVE TAPE	UL
KL-1	31.9	20.0	20.0	13.8	3M, THICKNESS=1.1mm	UL
KL-1(3M)					3M, THICKNESS=0.9mm	
KL-1(4945)					3M, THICKNESS=1.18mm	
KL-6	27.6	10.0	19.8	5.8	3M, THICKNESS=1.1mm	
KL-6(3M)					3M, THICKNESS=0.9mm	
KL-7	21.9	20.0	13.0	7.2	3M, THICKNESS=1.1mm	UL
KL-7(3M)					3M, THICKNESS=0.9mm	
KL-7(4945)					3M, THICKNESS=1.18mm	

NOTE: 1. IT IS HAND-CUT ADHESIVE TAPE, SO CAN NOT PERFECTLY STICK EVENLY. IT IS POSSIBLE TO HAVE SOME PORTION EXPOSED OR SHRINKING INWARD. THIS IS A NORMAL PHENOMENON.

此為手工背膠, 貼附無法非常平整, 會有外露或內縮屬正常現象.

2. THE PRODUCT SIZE IS NOT INCLUDED THE SIZES OF ADHESIVE TAPE AND ITS LINER.


產品尺寸皆不含背膠及離型紙.

3. SHRINKING IS NORMAL STATUS.

內縮為正常現象

4. MADE OF EQUIVALENT MATERIAL.

可使用同等材質

 ISO 9001 ISO 14001 QC 080000 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE WIRE MOUNT		SPEC. DWG.	
				MATERIAL NYLON 66 UL94V-2	DATE 1999.10.25		
				FINISH	DRAWN JASON		
				COLOR NATURAL	CHECK 		
PART NUMBER SEE ABOVE		DRAWING NUMBER KL-II		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
SIZE A4	SCALE NONE	UNIT mm	REV I				