
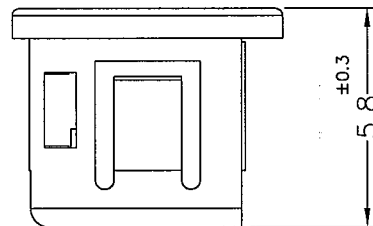


扣合後
(CLOSE)

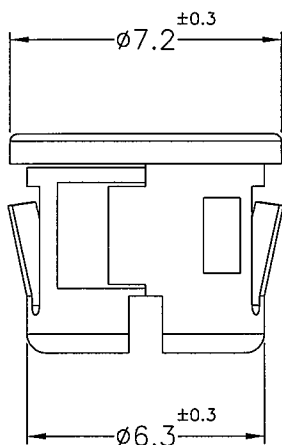

MOUNTING HOLE: $\phi 6.35\text{mm}^{+0.1}_{-0}$
THICKNESS: 0.6~1.0mm

NOTE: 1. MADE OF EQUIVALENT MATERIAL.

- 均可使用同等材質。
2. SUITABLE FOR $\phi 3$ LED WITH VISOR AND 2PIN, 3PIN.
產品適用 2PIN 及 3PIN, $\phi 3$ 有帽緣的LED燈裝配。
3. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.
色母環保檢測報告, 僅提供原始測試報告。



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2009.02.13

DRAWN
SAI

CHECKED
林祺翔

APPROVED
Kang

TITLE
LED HOLDER

MATERIAL
NYLON 66 UL94V-2

COLOR
BLACK

FINISH
UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.
LED3-16(B)

SIZE
A4

SCALE: 5:1

PART NO.
LED3-16(B)

SPEC. DWG.

REV
A

UNIT
mm

SHEET 1 OF 1