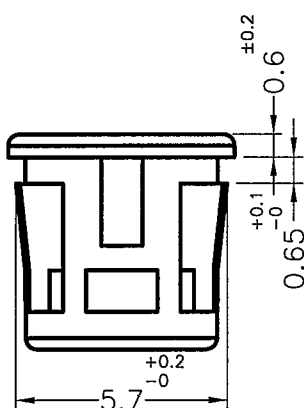




RECOMMEND MOUNTING HOLE: $\phi 5.2^{+0.1}_{-0}$
 RECOMMEND THICKNESS: 0.6mm

NOTE: 1. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質。

2. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.

色母環保檢測報告, 僅提供原始測試報告。

3. SUITABLE FOR $\phi 3$ LED WITH VISOR TO 2PIN / 3PIN

產品適用 2 PIN 與 3 PIN, $\phi 3$ 有帽緣的 LED 燈裝配。



康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO., ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2013.06.26	TITLE	LED SPACER SUPPORT		DWG. NO.	LED3-17-0.6(B)		PART NO.	LED3-17-0.6(B)	
	DRAWN	K.W	MATERIAL	NYLON 66 UL94V-2		LED3-17-0.6(B)		LED3-17-0.6(B)		LED3-17-0.6(B)	
	CHECKED	林祺翔	COLOR	BLACK	FINISH	SIZE	A4		SPEC. DWG.	REV	C
	APPROVED	Kang	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SCALE: 5:1		UNIT	mm	SHEET 1 OF 1		