


DIM.	TOL
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

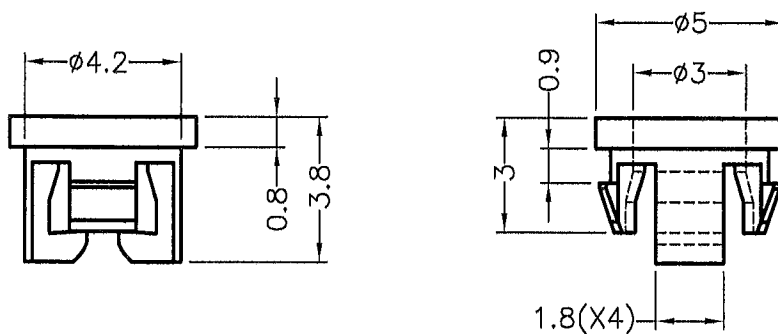

MOUNTING HOLE $\phi 4.3\text{mm}$
CHASSIS THICKNESS 0.8mm

Component - Plastics

E44716

SOLVAY ENGINEERING PLASTICS GBU

QUARTIER BELLE-ETOILE, AVE RAMBOZ, BOITE POSTALE 64, ST FONS CEDEX 69192 FR

B 50H1(r1)(f2)

Polyamide 66/6 (PA66/6), unfilled, "Technyl", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.38	V-0	4	0	120	-	-
	0.75	V-0	4	0	120	90	95
BK	1.0	V-0, 5VB	4	0	120	90	95
	1.5	V-0	4	0	120	90	95
	3.0	V-0	3	0	120	90	95

Comperative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): -

High-Voltage Arc Tracking Rate (HVTR): 0

Dimensional Stability (%): -

(f2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746G, where the acceptability for outdoor use is to be determined by UL.

(r1) - Virgin and regripd up to 60% by weight incl. have the same basic material characteristics, except for the 5VB rating.

NOTE - Materials designated "Technyl" may be prefixed by the letters "TY".

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1993-10-21

Last Revised: 2013-12-12

© 2014 UL LLC



NOTE:MADE OF EQUIVALENT MATERIAL.
均可使用同等材質.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE LED HOLDER		SPEC. DWG.	
				MATERIAL NYLON 66 UL94V-0		DATE 2013.08.22	
PART NUMBER LED3-29V0(B)				HARDNESS		DRAWN Y.C.P	
DRAWING NUMBER LED3-29(B)				COLOR BLACK		CHECK 	
SIZE A4	SCALE 5:1	UNIT mm	REV B	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	