
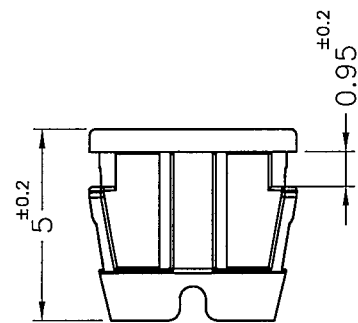





OR



RECOMMEND MOUNTING HOLE
RECOMMEND THICKNESS: 0.8mm

RECOMMEND LED

NOTE: 1. SUITABLE FOR $\phi 3$ LED WITH VISOR AND 2PIN, 3PIN.
產品適用 2PIN 及 3PIN, $\phi 2.8$ 有帽緣的LED燈裝配.
2. SHRINKING IS NORMAL STATUS.
內縮為正常現象.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2017.06.20	TITLE		LED HOLDER		DWG. NO.		PART NO.	
	DRAWN	K.W	MATERIAL		(DUPONT 101F) NYLON66 UL94V-2		LED3-50		LED3-50(B)	
	CHECKED	林祺翔	COLOR		BLACK	FINISH	SIZE	SPEC. DWG		REV
	APPROVED	Kang	UNLESS OTHERWISE SPECIFIED		TOLERANCE: SEE ABOVE		A4	SCALE: 5:1	UNIT mm	B SHEET 1 OF 1