

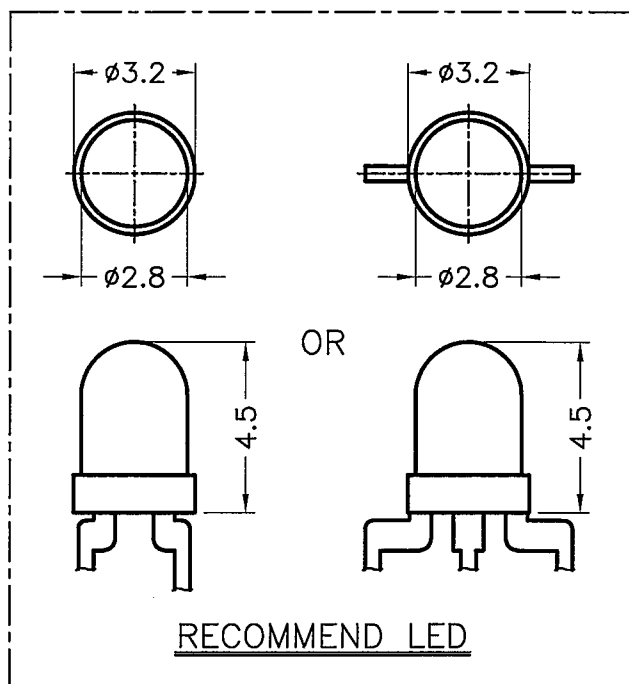




RECOMMENDED MOUNTING HOLE $\phi 5$
RECOMMENDED THICKNESS 1.1 mm

- NOTE: 1. SUITABLE FOR $\phi 3$ LED WITH VISOR AND 2PIN, 3PIN.
產品適用 2PIN 及 3PIN, $\phi 2.8$ 有帽緣的LED燈裝配.
2. SHRINKING IS NORMAL STATUS.
內縮為正常現象.
3. MADE OF EQUIVALENT MATERIAL.
均可使用同等材質.
4. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.
色母環保檢測報告, 僅提供原始測試報告.
5. HALOGEN FREE.
無鹵料.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.	DATE	2021.05.03	TITLE	LED HOLDER	DWG. NO.	LED3-50L	PART NO.	LED3-50LVB
	DRAWN	Y.C.P	MATERIAL	NYLON 66 UL94V-0	SIZE	A4	SPEC. DWG	REV
	CHECKED		COLOR	BLACK	FINISH			A
	APPROVED		UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SCALE: 5:1	UNIT	mm	SHEET 1 OF 1

DO NOT SCALE DRAWING