


REVISIONS			
REV	DESCRIPTION	DATE	BY

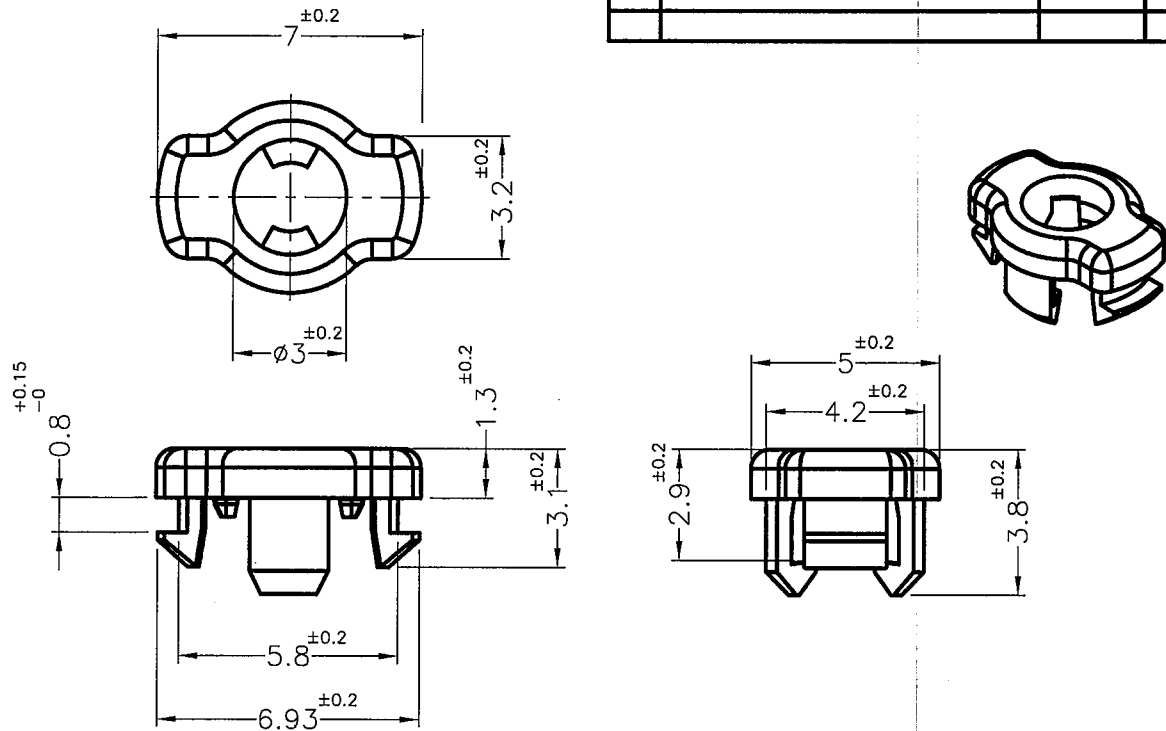

NOTE:1. SHRINKING IS NORMAL STATUS.

內縮為正常現象。

2. THE COLOR BATCH TEST REPORT IS ONLY FOR TEST PURPOSE.

色母環保檢測報告, 僅提供原始測試報告。

42 08 0000

PROSPECTOR®

CLICK TO CONTINUE

View additional material information including performance and processing data

The information presented on the UL Prospector database was acquired by UL Prospector from the producer of the material. UL Prospector cannot assume any liability for errors or omissions. UL Prospector is not responsible for the accuracy of the information presented on the database and is not responsible for the accuracy of the information presented on the database.

Component - Plastics

E50075

Guide information

☐ View IEC and ISO Test Methods

TEIJIN LIMITED RESIN AND PLASTIC

ENVIRONMENT QUALITY ASSURANCE DEPT., DIV 1, KASUMIGASEKI COMMON GATE, WEST TOWER, 2-1, KASUMIGASEKI 3-CHOME, CHIYODA-KU TOKYO 100-8585 JP

L-1225(###)(I2)

Polycarbonate (PC) "Panlite", furnished as pellets, powder

Color	Min. Thk (mm)	Flame Class	HWM	HAI	RTI Elec	RTI Imp	RTI Sfr
ALL	0.40	V-2	4	3	80	80	80
	0.75	V-2	3	1	125	115	125
	1.5	V-2	3	1	125	115	125
	1.9	HB	3	1	125	115	125
	3.0	HB	2	1	125	115	125
	6.0	HB	1	1	125	115	125

Comparative Tracking Index (CTI): 2

Dielectric Strength (kV/mm): 30

High-Voltage Arc Tracking Rate (HVTR): 4

Dimensional Stability (%): 0

Inclined Plane Tracking (IPT) kV: -

Volume Resistivity (10⁹ ohm-cm): 16

High Volt, Low Current Arc Resis (D495): 5

(##) - May be suffixed with any one letter or two letters, except for following one letter "U, V or Z", or two letters "LD, LL, LM, JM, ZL, ZE, or LS", or two letters started with "U, V or Z".


(I2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746C, where the acceptability for outdoor use is to be determined by UL.

UL Prospector is not responsible for the accuracy of the information presented on the database and is not responsible for the accuracy of the information presented on the database.

Report Date: 1999-02-10

Last Revised: 2017-05-22

© 2019 UL LLC

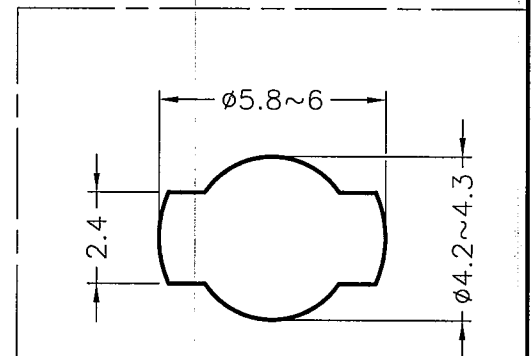

MOUNTING HOLE
THICKNESS 0.8mm

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE LED HOLDER		SPEC. DWG.	
				MATERIAL PC UL94V-2		DATE 2018.11.20	
				FINISH BLACK		DRAWN C. S. L	
				COLOR BLACK		CHECK 彭永承	
PART NUMBER LED3-53(B)		DRAWING NUMBER LED3-53		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED Kang	
SIZE A4	SCALE 5:1	UNIT mm	REV A				