


DIM	TOL
5mmDOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mmUP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

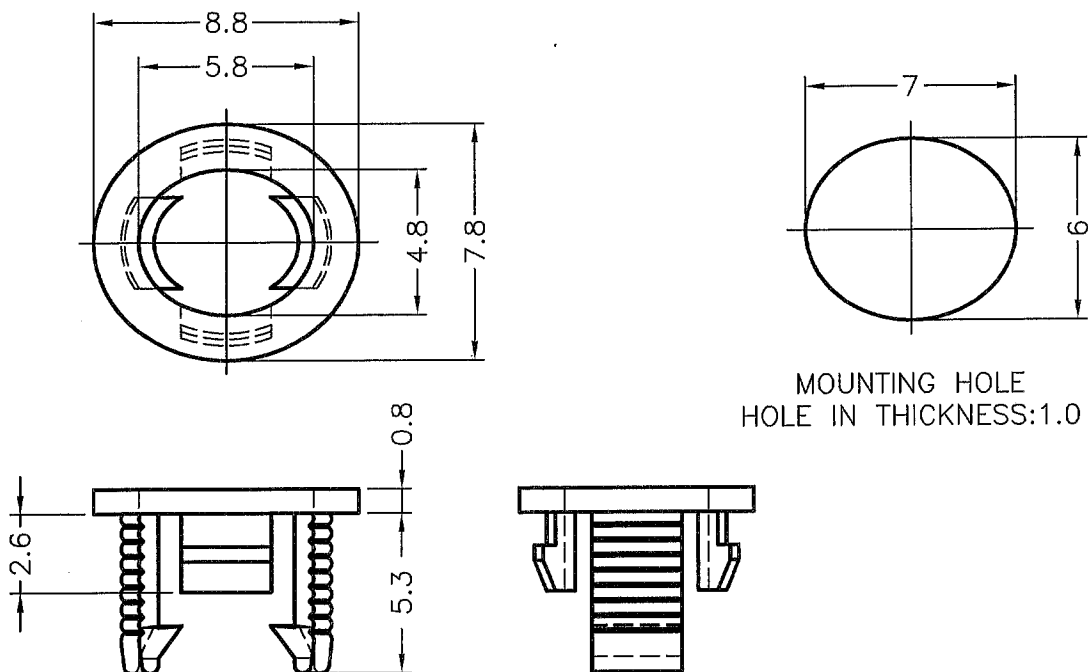

MOUNTING HOLE
HOLE IN THICKNESS:1.0

Component - Plastics

E41938

E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 60719, WILMINGTON DE 19800

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HVI	HA1	RTI Elec	RTI imp	RTI Str
ALL	0.75	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HVT): 0

Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -

Volume Resistivity (10¹² ohm-cm): 14

High Volt, Low Current Arc Res (D495): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MINI" for Minion or "DEL" for Delrin or "GRA" for Graphtin or "RVN" for Rylnite or "ETPV" for ETPV grades.

r9 - Virgin and regrid up to 40% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.75mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTIs for all properties and Regrid exceeding 28% is limited to V-2 Flameability for WT, RD, DR.


ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related products. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the manufacture and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1993-07-28

Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.

UL US

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE		SPEC. DWG.	
				LED HOLDER			
				MATERIAL		DATE	
				NYLON 66 UL94V-2		2001.03.05	
				FINISH		DRAWN	
						JASON	
COLOR				BLACK		CHECK	
							
UNLESS OTHERWISE SPECIFIED TOLERANCE				SEE ABOVE		APPROVED	
							
PART NUMBER		DRAWING NUMBER					
LED5-6		LED5-6					
SIZE	SCALE	UNIT	REV				
A4	4:1	mm	A				