


DIM	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

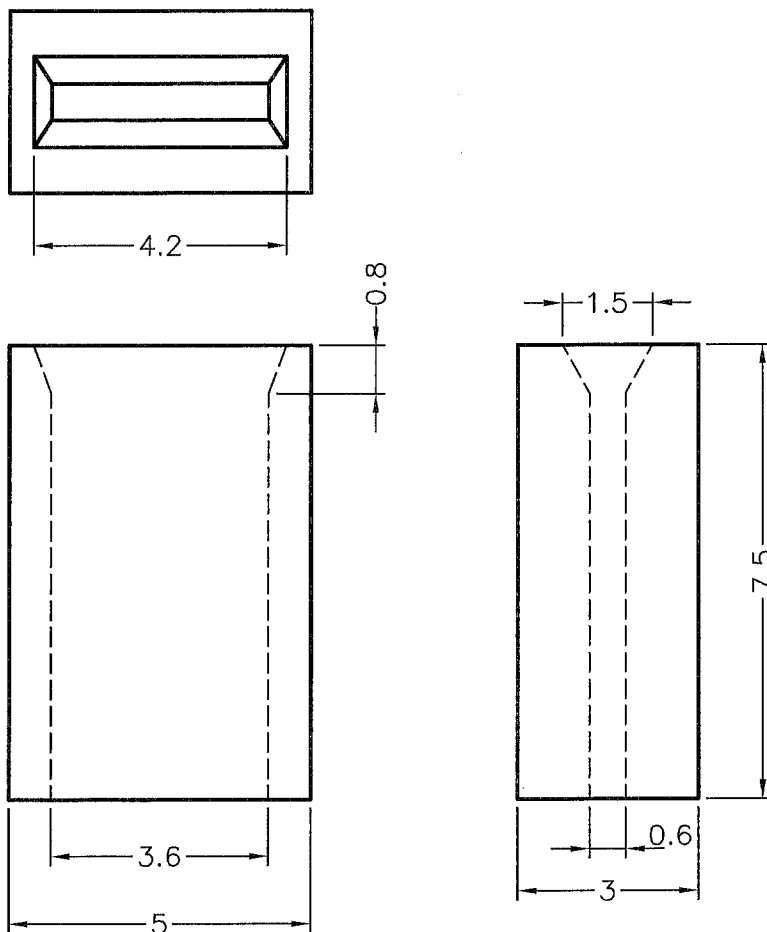

Component - Plastic

E41938

E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19860

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HRR	HA:	RTI Elec	RTI Imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High Voltage Arc Tracking Rate (HATR): 0

Dimensional Stability (%): -

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers; (2) Material designations may be prefixed by "ZYT" for Zytel or "BIN" for Minlon or "DEL" for Delrin or "GRA" for Gradelin or "RYN" for Rynite or "ETPV" for ETPV grades.

r9 - Virgin and regrid up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.75mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI's for all properties and Regrid exceeding 25% is limited to V-2 Flammability for WT, RD, BK.

ANSMUL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSMUL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the manufacture and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1995-07-29
Last Revised: 2010-07-22

© 2015 Underwriters Laboratories Inc.

UL US

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE LED SPACER SUPPORT		SPEC. DWG.	
				MATERIAL NYLON 66 UL94V-2		DATE 2001.11.26	
				FINISH		DRAWN AMY	
				COLOR NATURAL		CHECK 	
				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
PART NUMBER LEDJ-7.5		DRAWING NUMBER LEDJ-7.5					
SIZE A4	SCALE 8:1	UNIT mm	REV A				