





DIM.	TOL
5mmDOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mmUP	±1.0

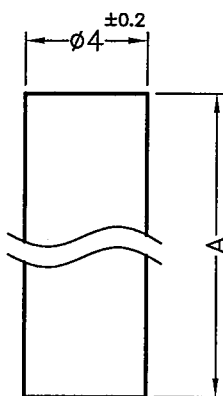

PART NO.	A
LEDS-1(B)	1.0
LEDS-1.5(B)	1.5
LEDS-2(B)	2.0
LEDS-2.5(B)	2.5
LEDS-3(B)	3.0
LEDS-3.5(B)	3.5



PART NO.	A
LEDS-4(B)	4.0
LEDS-4.5(B)	4.5
LEDS-5(B)	5.0
LEDS-5.5(B)	5.5
LEDS-6(B)	6.0
LEDS-6.5(B)	6.5
LEDS-7(B)	7.0
LEDS-7.5(B)	7.5
LEDS-8(B)	8.0
LEDS-8.5(B)	8.5
LEDS-9(B)	9.0
LEDS-9.5(B)	9.5
LEDS-10(B)	10.0
LEDS-10.5(B)	10.5
LEDS-11(B)	11.0
LEDS-11.5(B)	11.5
LEDS-12(B)	12.0
LEDS-12.5(B)	12.5
LEDS-13(B)	13.0
LEDS-13.5(B)	13.5

PART NO.	A
LEDS-14(B)	14.0
LEDS-14.5(B)	14.5
LEDS-15(B)	15.0
LEDS-15.5(B)	15.5
LEDS-16(B)	16.0
LEDS-16.5(B)	16.5
LEDS-17(B)	17.0
LEDS-17.5(B)	17.5
LEDS-18(B)	18.0
LEDS-18.5(B)	18.5
LEDS-19(B)	19.0
LEDS-19.5(B)	19.5
LEDS-20(B)	20.0
LEDS-20.5(B)	20.5
LEDS-21(B)	21.0
LEDS-21.5(B)	21.5
LEDS-22(B)	22.0
LEDS-22.5(B)	22.5
LEDS-23(B)	23.0
LEDS-23.5(B)	23.5
LEDS-24(B)	24.0

NOTE:1. SHRINKING IS NORMAL STATUS.

內縮為正常現象.

2. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2001.10.30	TITLE LED SPACER SUPPORT	DWG. NO. LEDS-BHH		PART NO. SEE ABOVE	
	DRAWN AMY	MATERIAL NYLON 66 UL94V-2				
	CHECKED 林祺翔	COLOR BLACK	FINISH	SIZE A4	SPEC. DWG	REV D
	APPROVED Kang	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SCALE: 4:1	UNIT mm	SHEET 1 OF 1