


DIM ARE IN INCHES	
DIM.	TOL
X.X	±0.1
X.XX	±0.01
X.XXX	±0.005
X	±1

REVISIONS			
REV	DESCRIPTION	DATE	BY

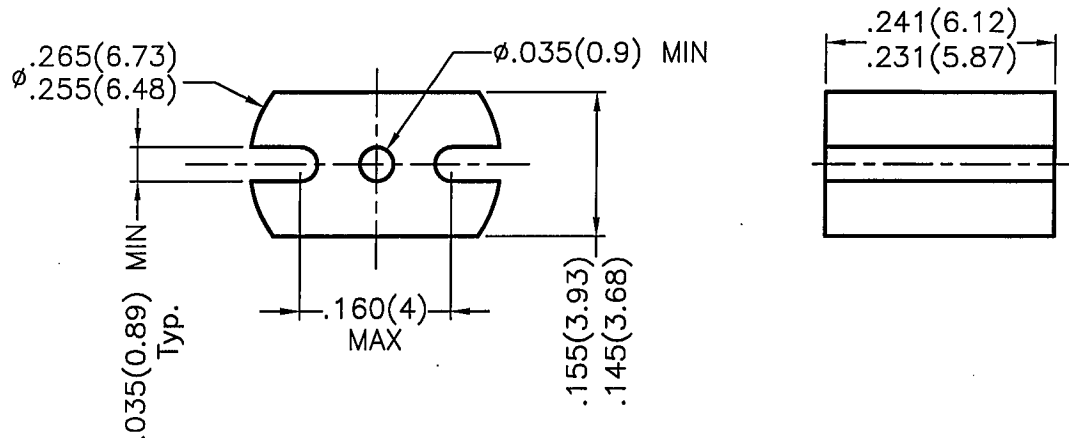


QMFZ2 Component - Plastics
 RHODIA ENGINEERING PLASTICS
 QUARTIER BELLE-ETOILE AVE RAMBOZ BOITE POSTALE 64 69192 ST FONS CEDEX FRANCE
 Material Designation: B 50H1(r1)
 Product Description: Polyamide 66/6 (PA66/6), designated "Technyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWIT
ALL	0.38	V-0	4	0	120	-	-	-	-
	0.75	V-0	4	0	120	90	95	-	-
BK	1	V-0, 5VB	4	0	120	90	95	-	-
	1.5	V-0	4	0	120	90	95	-	-
	3	V-0	3	0	120	90	95	-	-

CTI: 0 HVTR: 0 D495: 6 IEC Ball Pressure (C): -
 Dielectric Strength (kV/mm): - Volume Resistivity (10¹²ohm-cm): - Dimensional Stability(%): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (C): -
 ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -
 (r1) Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

Report Date: 10/21/1993 Underwriters Laboratories Inc®
 UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE SPACER		SPEC. DWG.	
				MATERIAL NYLON 66 UL94V-0		DATE 2012.12.12	
				FINISH		DRAWN T.C	
				COLOR BLACK		CHECK 	
				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
PART NUMBER LEDSA-6V0B		DRAWING NUMBER LEDSA-6					
SIZE A4	SCALE 5:1	UNIT in(mm)	REV A				