





DIM.	TOL
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

Patented Product
專利產品

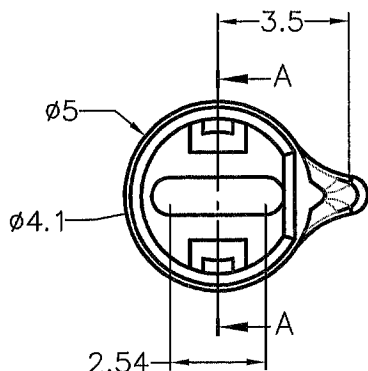

SECTION A-A

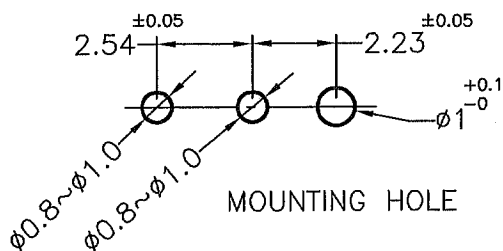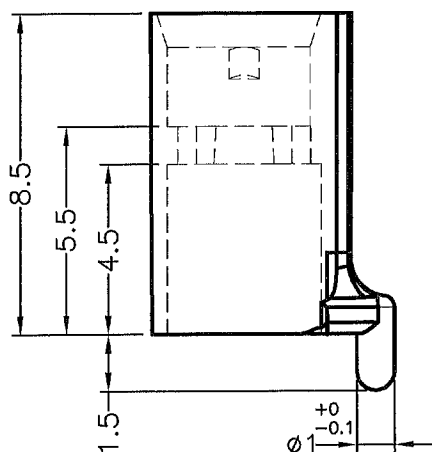

MOUNTING HOLE

Component - Plastics

E44716

RHODIA ENGINEERING PLASTICS

QUARTIER BELLE-ETOILE, AVE RAMBOZ, BOITE POSTALE 64, ST FONS CEDEX 69192 FR

B 50H1(r1)

Polyamide 66/6 (PA66/6), unfilled, "Technyl", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.38	V-0	4	0	120	-	-
	0.75	V-0	4	0	120	90	95
BK	1.0	V-0, 5VB	4	0	120	90	95
	1.5	V-0	4	0	120	90	95
	3.0	V-0	3	0	120	90	95

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): -

High-Voltage Arc Tracking Rate (HVTR): 0

Dimensional Stability (%): -

(r1) - Virgin and reground up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

NOTE - Materials designated "Technyl" may be prefixed by the letters "TY".

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1993-10-21

Last Revised: 2013-02-13

© 2013 UL LLC

UL US

康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE LED SPACER SUPPORT		SPEC. DWG.	
PART NUMBER LEDXK3-5.5V0B				MATERIAL NYLON 66 UL94V-0		DATE 2013.08.01	
DRAWING NUMBER LEDXK3-5.5				FINISH		DRAWN T.C	
SIZE A4				COLOR BLACK		CHECK 王同賜	
SCALE 5:1				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED Kang	
UNIT mm				REV A			