
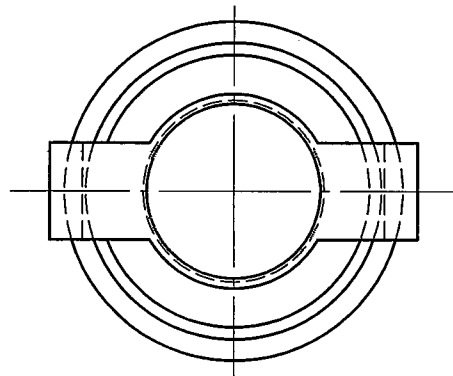


成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

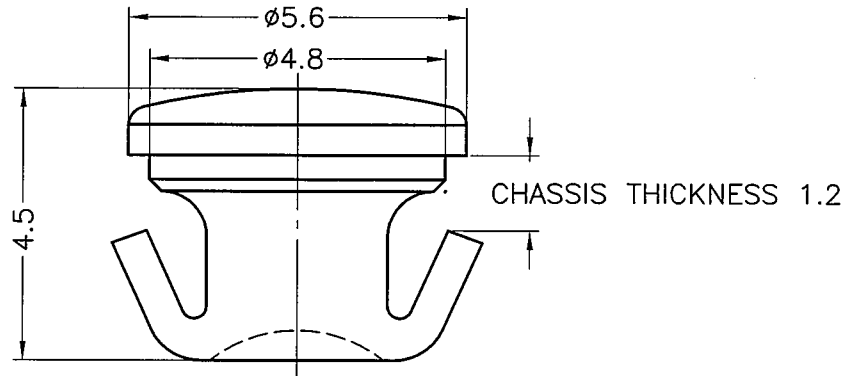

MOUNTING HOLE ø5

QMFZ2 Component - Plastics
 TEIJIN CHEMICALS LTD
 HIBIYA DAIBIRU BLDG 2-2 UCHISAIWAI-CHO 1-CHOME CHIYODA-KU TOKYO 100-0011 JAPAN
 Material Designation: L-1225(#)(F2)

Tuesday, June 08, 2004

E50075

Product Description: Polycarbonate (PC), designated "Panlite" furnished as pellets, powder.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.4	V-2	4	3	80	80	80	-	-
	0.75	V-2	3	1	80	80	80	-	-
	1.5	V-2	3	1	125	115	125	-	-
	1.9	HB	3	1	125	115	125	-	-
	3	HB	2	1	125	115	125	-	-
	6	HB	1	1	125	115	125	-	-
CTI: 2		HVTR: 4		D495: 5		IEC Ball Pressure (C): -			

Dielectric Strength (kV/mm): 30

Volume Resistivity (10¹⁰ohm-cm): 16

Dimensional Stability(%): 0

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (°C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

(#)

Material designation may be suffixed with any one or two letters.

(f2)

Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746C, where the acceptability for outdoor use is to be determined by UL Inc.

Report Date: 2/10/1989

Underwriters Laboratories Inc®

 ISO 9001 ISO 14001 QC 080000 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO.,LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.				TITLE LED導光柱		產品規格圖面	
				MATERIAL PC UL94V-2	DATE 2006.09.11		
				FINISH	DRAWN JOHNNY		
				COLOR NATURAL	CHECK 曾繁誠		
PART NUMBER LEM-7S		DRAWING NUMBER LEM-7S		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE			
SIZE A4	SCALE 8:1	UNIT mm	REV B	APPROVED Kang			