



DIM.	TOL
$L \leq 10$	± 0.2
$10 < L \leq 30$	± 0.3
$30 < L \leq 50$	± 0.5
$50 < L \leq 100$	± 0.7
$100 < L \leq 250$	± 1.2
ABOVE 250	± 1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY


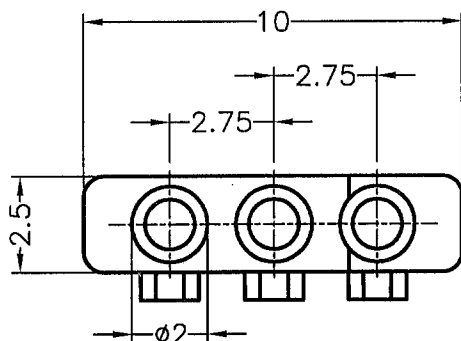


POLISHED SURFACES



POLISHED SURFACES

(OTHER AREAS ARE ALL IN MATTED SURFACES)

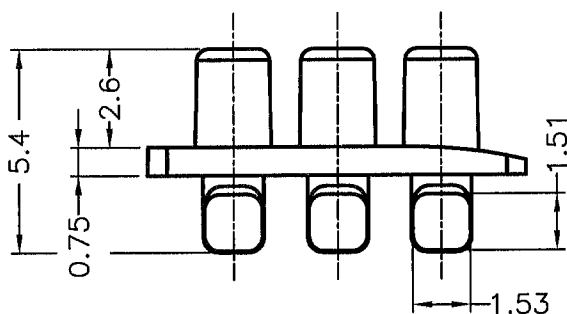

Component - Plastics

E207780

SABIC INNOVATIVE PLASTICS JAPAN L L C

PACIFIC GRADES - RESIN, 2-2 KINUGAOKA, MOKA-SHI TOCHIGI-KEN 321-4392 JP

925A(GG), 945A(GG), 955A(GG)

Polycarbonate (PC), "Lexan", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HA1	RTI Elec	RTI Imp	RTI Str
ALL	0.8	V-2	3	4	130	120	125
	1.0	V-2	3	4	130	120	125
	1.5	V-2	3	3	130	120	125
	2.3	V-2	3	3	130	120	130
	2.5	V-1	3	3	130	120	130
	3.0	V-0	2	3	130	120	130

Comparative Tracking Index (CTI): 2

Dimensional Stability (%): 0

High-Voltage Arc Tracking Rate
(HVTR): 3

High Volt. Low Current Arc Resis (D495): 7

Dielectric Strength (kV/mm): 39

Volume Resistivity (10^8 ohm-cm): 16

(GG) - Represents a global grade as covered in Recognized Component File E161759

NOTE - Material designation may be followed by a color nomenclature consisting of either an alpha/numeric or numeric/alpha combination.

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE		LIGHT PIPE		SPEC. DWG.	
MATERIAL		PC UL94V-2		DATE	
FINISH				DRAWN	
COLOR		CLEAR		CHECK	
UNLESS OTHERWISE SPECIFIED TOLERANCE		SEE ABOVE		APPROVED	

PART NUMBER		DRAWING NUMBER	
LEM-92		LEM-92	
SIZE	SCALE	UNIT	REV
A4	5:1	mm	A

陳彥璋

Kang