


MOUNTING HOLE: $\phi 4.0\text{mm}$
THICKNESS: 1.2mm
(RECOMMEND FOR REFERENCE ONLY)

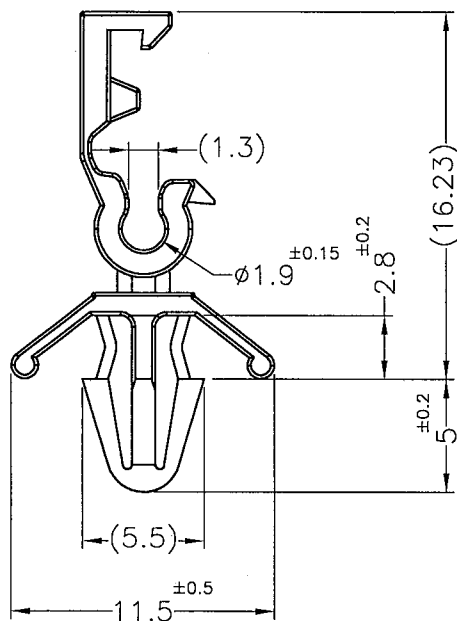

NOTE: 1. SHRINKING IS NORMAL STATUS.


內縮為正常現象。

2. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質。

3. PULL OUT VALUE CANNOT BE LOWER THAN 3.5 kgf.

拉力值不可低於 3.5 kgf.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

康揚塑膠五金(泰國)有限公司

บริษัท ดึง พยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด

KANG YANG HARDWARE (THAILAND) CO., LTD.

康揚越南有限公司

CÔNG TY TNHH KANG YANG VIỆT NAM

KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2021.04.01	TITLE		DWG. NO.		PART NO.		
	DRAWN	Terry	MATERIAL		THV-16		THV-16		
	CHECKED		COLOR	FINISH	SIZE A4		SPEC. DWG.		REV B
	APPROVED		UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE						
					SCALE: 3:1		UNIT	mm	SHEET 1 OF 1