
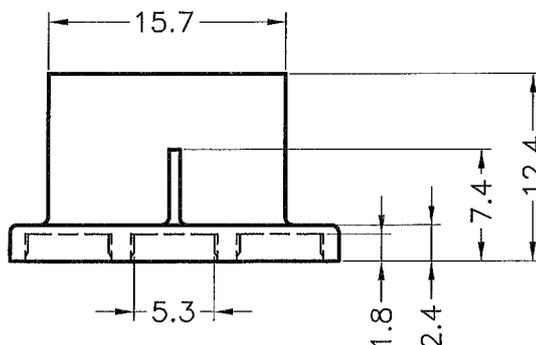
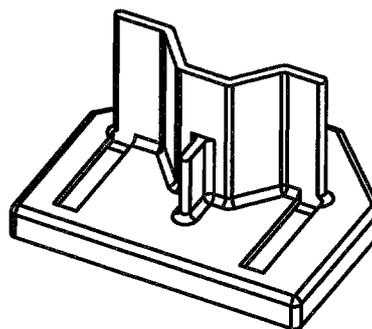


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

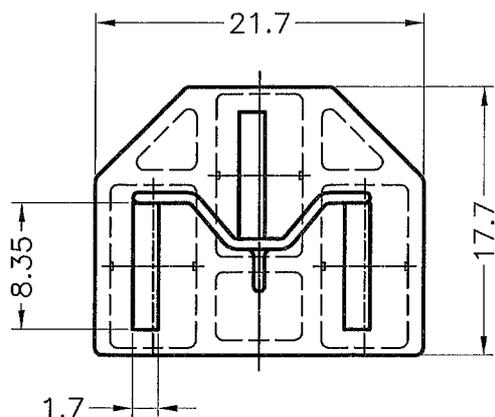

QMF22 Component - Plastics Friday, October 24, 2003 E44716

RHODIA ENGINEERING PLASTICS
 QUARTIER BELLE-ETOILE AVE RAMBOZ BOITE POSTALE 64 69192 ST FONS CEDEX FRANCE
 Material Designation: B 50H1 (r1)

Product Description: Polyamide 66/6 (PA66/6), designated "Technyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IHC GWIT	IHC GWFI
ALL	0.38	V-0	4	0	120	-	-	-	-
	0.75	V-0	4	0	120	90	95	-	-
BK	1	V-0, 5VB	4	0	120	90	95	-	-
	1.5	V-0	4	0	120	90	95	-	-
	3	V-0	3	0	120	90	95	-	-

CTI: 0 HVTR: 0

D495: 6


IHC Ball Pressure (C):

Dielectric Strength (kV/mm): Volume Resistivity (10¹⁰ohm-cm): Dimensional Stability(%):
 ISO Tensile Strength (MPa): ISO Flexural Strength (MPa): ISO Heat Deflection (C):
 ISO Tensile Impact (kJ/m²): ISO Izod Impact (kJ/m²): ISO Charpy Impact (kJ/m²):
 (r1) Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

Report Date: 10/21/1993

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>	TITLE		SOCKET COVER		SPEC. DWG.			
	MATERIAL		NYLON 66 UL94V-0		DATE		2007.04.14	
	FINISH				DRAWN		JOHNNY	
	COLOR		BLACK		CHECK			
PART NUMBER		DRAWING NUMBER		UNLESS OTHERWISE SPECIFIED TOLERANCE		APPROVED		
PLCD-1V0B		PLCD-1V0B		SEE ABOVE				
SIZE	SCALE	UNIT	REV					
A4	2:1	mm	A					