REVISIONS			
REV	DESCRIPTION	DATE	BY

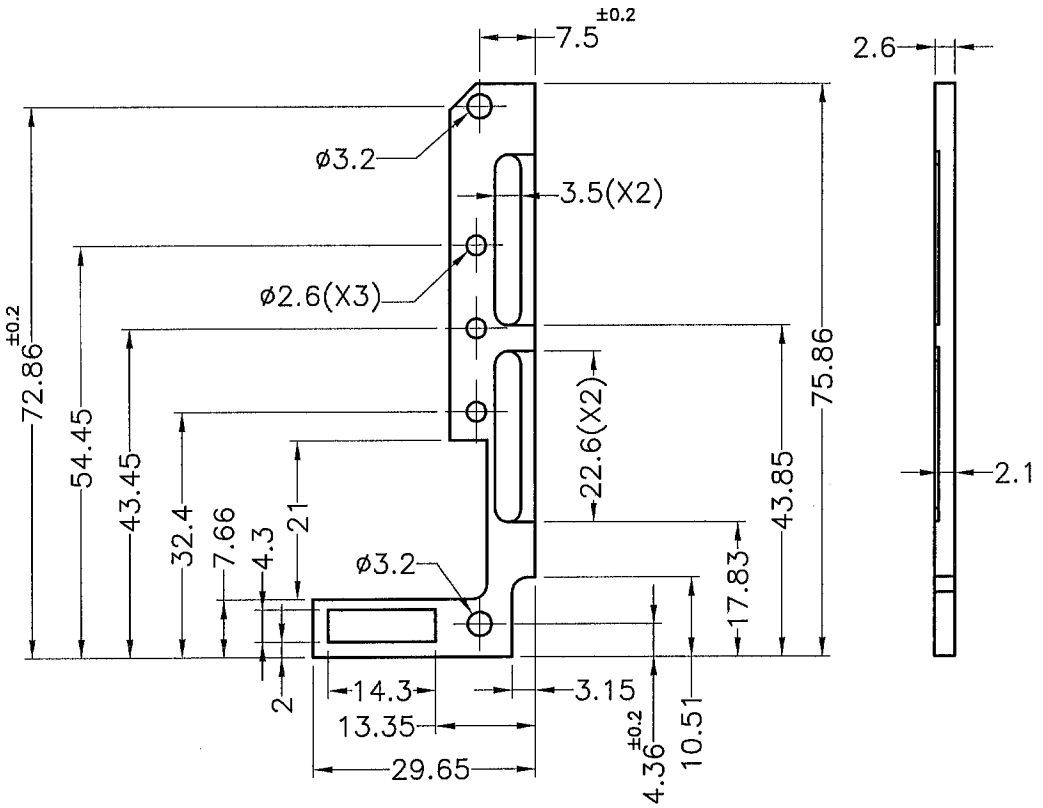

QMFZ2 Component - Plastics Tuesday, May 25, 2004 E47960
DSM ENGINBERING PLASTICS B V
POSTBUS 43 6130 AA SITTARD THE NETHERLANDS
Material Designation: TE250F6(h1)(j)

Product Description: Polyamide 4/6 (PA4/6), glass reinforced, flame retardant, designated "Stanyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.35	V-0	-	-	-	-	-	-	-
	0.75	V-0	0	0	140	110	120	-	-
	1.5	V-0	0	0	140	125	125	-	-
	3	V-0	0	0	140	130	130	-	-

IEC CTI:
CTI: 2 - HVTR: 1 D495: 6 IEC Ball Pressure (°C): -
Dielectric Strength (kV/mm): 23 Volume Resistivity (10^{x}ohm-cm): - Dimensional Stability(%): 0.0
ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (°C): -
ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -

(h1) Virgin and regrind, up to 50% by weight inclusive, in thicknesses of 0.75mm and greater, have the same basic material characteristics, except for CTI.

(j) Virgin and regrind, up to 100% by weight inclusive, have the same basic material characteristics with respect to Flammability in the 0.75mm thickness and greater.

Report Date: 1/1/2003 Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN)CO.,LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD. ISO 9001 ISO 14001 QC 080000	TITLE 絕緣片	產品規格圖面
	MATERIAL NYLON 46 UL94V-0	DATE 2009.12.11
	FINISH	DRAWN SAI
	COLOR BLACK	CHECK 朱益霆
	UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.3	APPROVED

PART NUMBER	DRAWING NUMBER		
EML-7(B)	EML-7		
SIZE A4	SCALE 1:1	UNIT mm	REV A