


成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

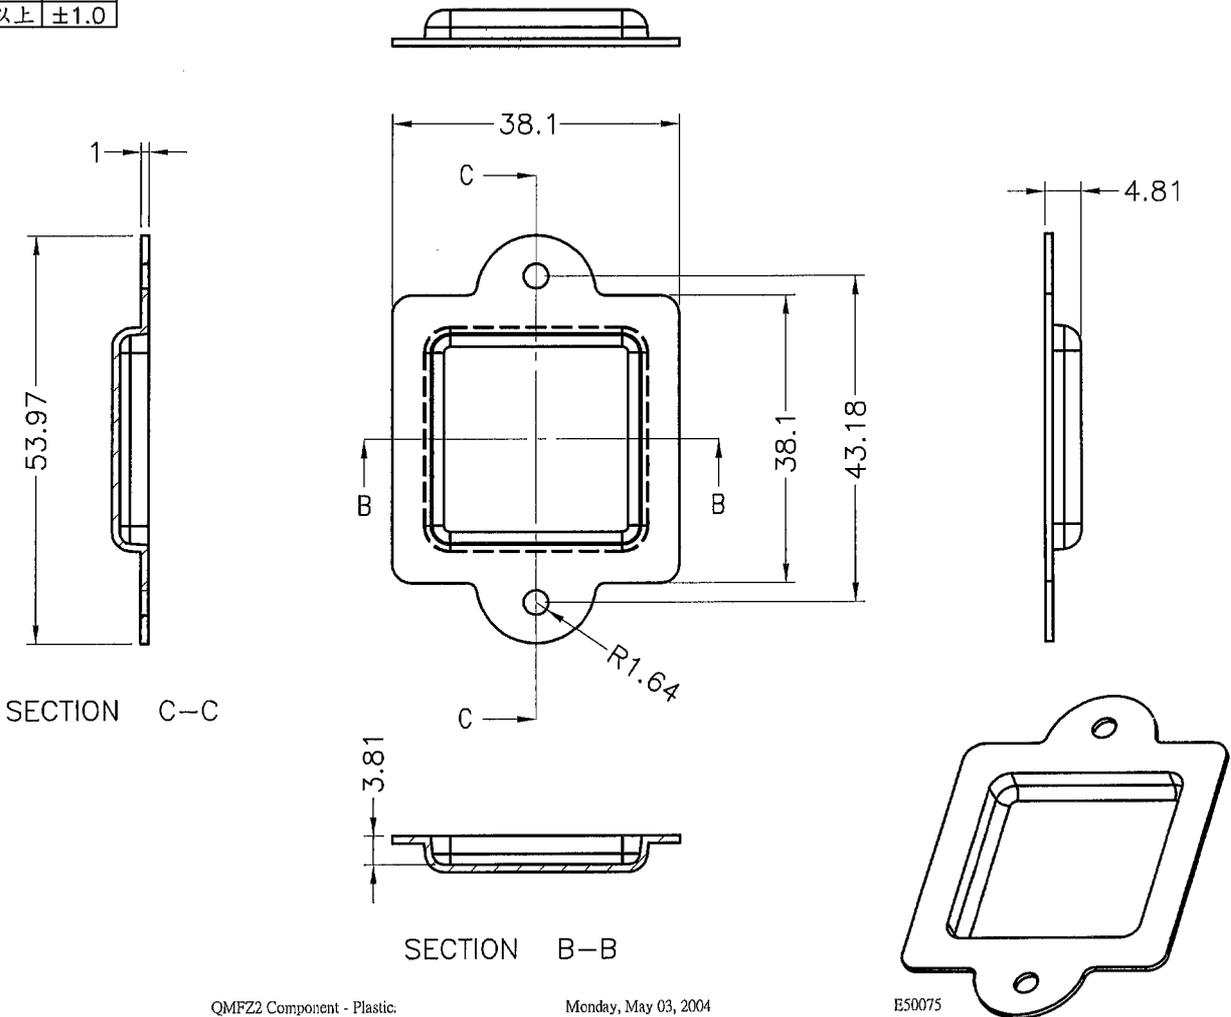

QMFZ2 Component - Plastic. Monday, May 03, 2004 E50075

TEIJIN CHEMICALS LTD
HIBIYA DAIBIRU BLDG 2-2 UCHISAIWAI-CHO 1-CHOME CHIYODA-KU TOKYO 100-0011 JAPAN
Material Designation: LN-2250(##)(f1)

Product Description: Polycarbonate (PC), designated "Panlite" furnished as pellets, powder.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Blec	RTI Imp	RTI Str	IBC GWIT	IBC GWFI
ALL	0.43	V-2	-	-	80	80	80	-	-
	3	V-0	3	0	125	115	125	-	-
	6	V-0	3	0	125	115	125	-	-

CTI: 3 IEC CTI: - HVTR: 3 D495: 6 IEC Ball Pressure (C): -

Dielectric Strength (kV/mm): - Volume Resistivity (10¹²ohm-cm): - Dimensional Stability(%): 0
ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (°C): -
ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -

(##) May be suffixed with one or two letters except for a single letter U, V or Z or the letters U, V or Z followed by another letter.
(f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

Report Date: 5/11/1989 Underwriters Laboratories Inc®
UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULL.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 東莞康揚塑膠五金電子廠 DONG GUAN KANG YANG PLASTIC HARDWARE COMPANY 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.		TITLE	保護蓋	產品規格圖面	
		MATERIAL	PC UL94V-0	DATE	2006.02.27
		FINISH		DRAWN	KEN
		COLOR	BLACK	CHECK	
PART NUMBER	SCD-9PC(B)	DRAWING NUMBER	SCD-9PC(B)	UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE
SIZE	A4	SCALE	1:1	UNIT	mm
REV	A	APPROVED			