


REVISIONS			
REV	DESCRIPTION	DATE	BY

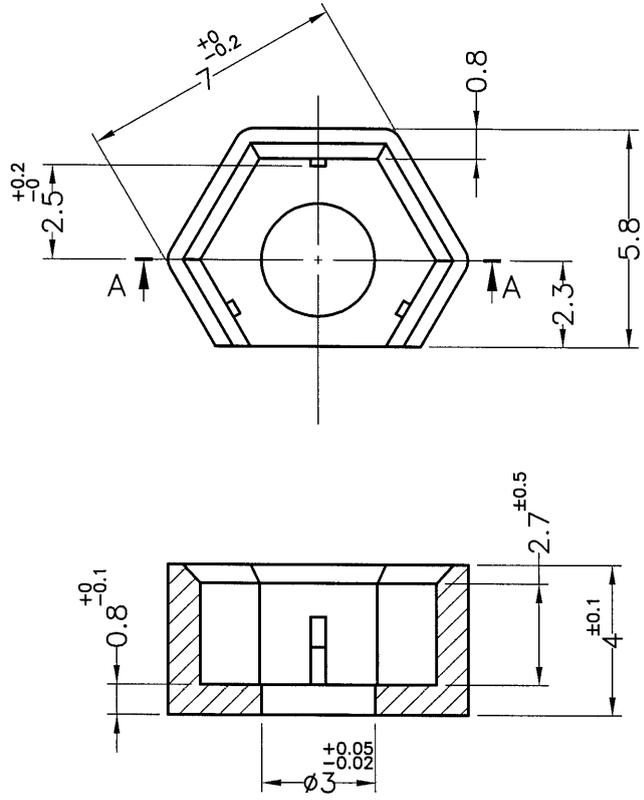

SECTION A-A

QMFZ2 Component - Plastics
 DSM ENGINEERING PLASTICS B V
 POSTBUS 43 6130 AA SITTARD THE NETHERLANDS
 Material Designation: TE250F6(h1)(G)

Tuesday, May 25, 2004

E47960

Product Description: Polyamide 4/6 (PA4/6), glass reinforced, flame retardant, designated "Stanyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.35	V-0	-	-	-	-	-	-	-
	0.75	V-0	0	0	140	110	120	-	-
	1.5	V-0	0	0	140	125	125	-	-
	3	V-0	0	0	140	130	130	-	-

IEC CTI:

CTI: 2	HVTR: 1	D495: 6	IEC Ball Pressure (C): -
Dielectric Strength (kV/mm): 23	Volume Resistivity (10 ¹² ohm-cm): -	ISO Flexural Strength (MPa): -	Dimensional Stability(%): 0.0
ISO Tensile Strength (MPa): -	ISO Tensile Impact (kJ/m ²): -	ISO Heat Deflection (°C): -	ISO Charpy Impact (kJ/m ²): -

(h1) Virgin and regrind, up to 50% by weight inclusive, in thicknesses of 0.75mm and greater, have the same basic material characteristics, except for CTI.

(i) Virgin and regrind, up to 100% by weight inclusive, have the same basic material characteristics with respect to Flammability in the 0.75mm thickness and greater.

Report Date: 1/1/2003 Underwriters Laboratories Inc®
 UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>	TITLE		絕緣柱	產品規格圖面		
	MATERIAL		N46 UL94V-0+GF	DATE		2009.03.18
	FINISH			DRAWN		Ken
	COLOR		NATURAL	CHECK		
PART NUMBER	DRAWING NUMBER		UNLESS OTHERWISE SPECIFIED TOLERANCE			
UT-7N46	UT-7N46		±0.2			
SIZE	SCALE	UNIT	REV	APPROVED		
A4	5:1	mm	A			