



成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

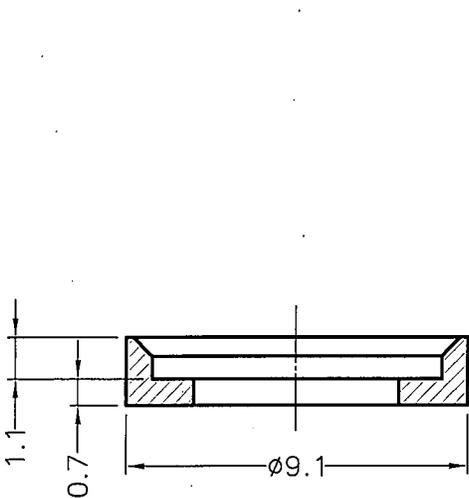

SECTION A-A

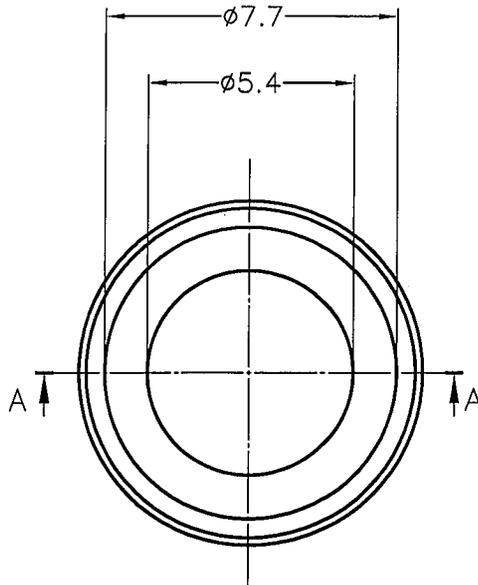

QMF22 Component - Thursday, November 20, 2003 E41938
 E I DUPONT DE NEMOURS & CO INC
 ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 50713 WILMINGTON DE 19880
 Material Designation: 100P, 500P, 900P, 1700P
 Product Description: Acetal "Polyoxymethylene" (POM), designated "Delrin" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI imp	RTI Str	IBC GWIT	IBC GWFI
ALL	0.75	HB	4	0	50	50	50	-	-
	1.5	HB	4	0	110	85	90	-	-
	3	HB	3	0	110	90	95	-	-

IEC CTE:
 CTE: 0 HVTR: 0 D-95: 5 IEC Ball Pressure (C): -
 Dielectric Strength (kV/mm): - Volume Resistivity (10¹²ohm-cm): - Dimensional Stability (%): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (C): -
 ISO Tensile Impact (kJ/m²): - ISO Load Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -

NOTE (1) Material designations that are color pigmented may be followed by suffix letters and numbers.
 (2) Material designations may be prefixed by "ZYT" or "MIN" or "ZEN" or "DEL" or "CRA" or
 Report Date: 8/30/1977 Underwriters Laboratories Inc/R

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.	TITLE SPACER		產品規格圖面	
	MATERIAL POM		DATE 2011.03.01	
	FINISH		DRAWN ROBERT	
	COLOR BLACK		CHECK 	
PART NUMBER WSUA-1POM(B)	DRAWING NUMBER WSUA-1POM(B)		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
SIZE A4	SCALE 3:1	UNIT mm	REV A	APPROVED