


MOUNTING HOLE:  $\phi 3\text{mm}$   
 THICKNESS: 0.7~1.6mm  
 (RECOMMEND FOR REFERENCE ONLY)

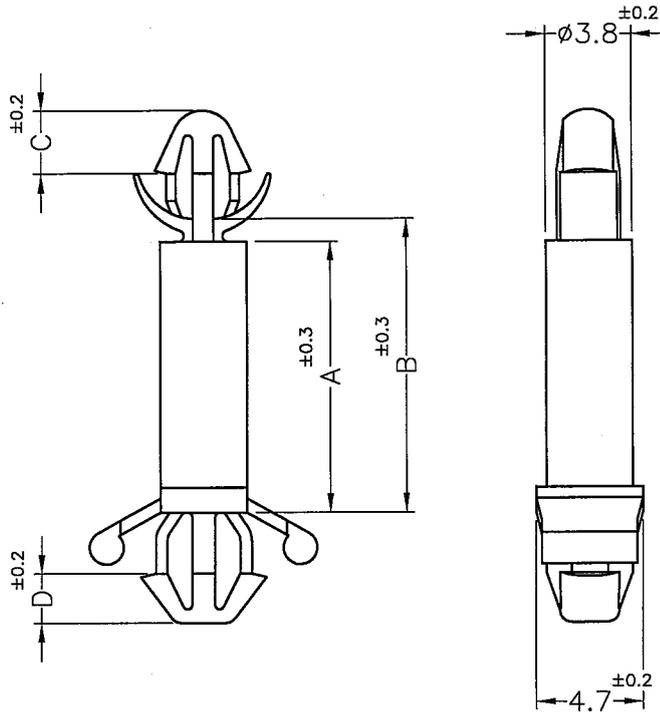

MOUNTING HOLE:  $\phi 4\text{mm}$   
 THICKNESS: 0.8~2.5mm  
 (RECOMMEND FOR REFERENCE ONLY)

PART NO.	A	B	C	D
LCH-6.3S(GR)	5.3	6.3	2.8	2.2
LCH-15S(GR)	12.0	13.0		2.5

NOTE: 1. SHRINKING IS NORMAL STATUS.

內縮為正常現象。

2. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質。

3. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.

色母環保檢測報告, 僅提供原始測試報告。



康揚企業股份有限公司  
 KANG YANG HARDWARE ENTERPRISE CO., LTD.  
 康揚塑膠(東莞)有限公司  
 KANG YANG PLASTIC(DONG GUAN)CO., LTD.  
 康哲電腦配件(吳江)有限公司  
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.  DO NOT SCALE DRAWING	DATE	TITLE	DWG. NO.	PART NO.	
	2022.05.31	SPACER SUPPORT	LCH-HS(GR)	SEE ABOVE	
	DRAWN	MATERIAL		SIZE	SPEC. DWG.
	FORSEN	NYLON 66 UL94V-2	A4		B
CHECKED	COLOR	FINISH	SCALE: 3:1	UNIT	SHEET 1 OF 1
Yuping	GREEN		mm		
APPROVED	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE				
Kang					