

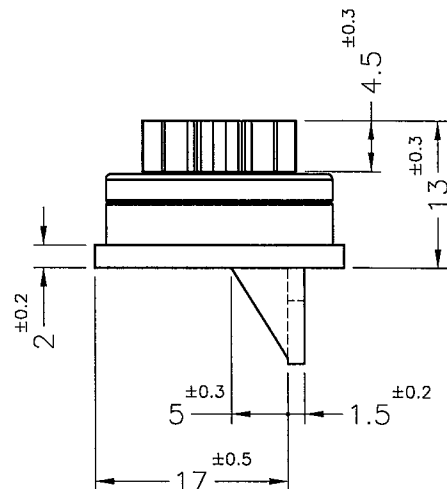
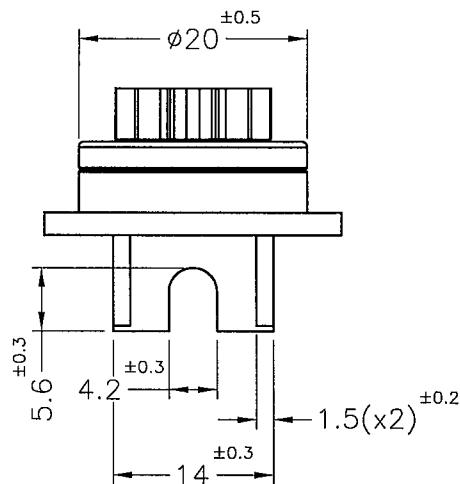


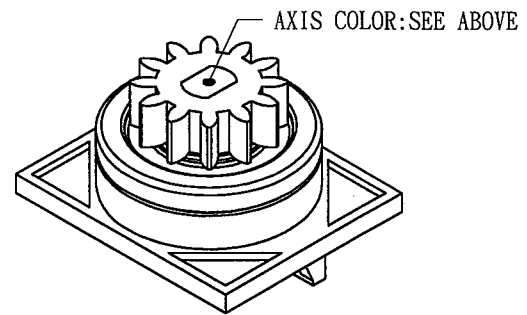

NOTE: 1. GEAR

- ① MODULUS(模數): 1
- ② PITCH DIAMETER(節圓直徑): $\phi 12$
- ③ NUMBER OF TEETH(齒數): 12
- ④ PRESSURE ANGLE(壓力角): 20°
2. TORSION(扭力): SEE ABOVE
3. PLACE IN ROOM TEMPERATURE, THE TORQUE AT 20rpm/min SHALL BE WITHIN UPPER TABLE.
標準室溫底下, 20轉/分鐘 扭力須符合上表.
4. SPECIAL COMMENTS(特別條件)
 - ① "ROOM TEMPERATURE" IN THIS DRAWING MEANS THE SAME DEFINED.
(TEMPERATURE: $23 \pm 2^\circ \text{C}$, RELATIVE HUMIDITY: $50 \pm 10\%$)
圖面上指的室溫為 $23 \pm 2^\circ \text{C}$, 濕度 $50 \pm 10\%$
 - ② TORQUE WILL BE CHANGED BY TEMPERATURE AND RPM.
扭力會隨溫度及轉速而有所差異.
5. MADE OF EQUIVALENT MATERIAL.
均可使用同等材質.
6. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.
色母環保檢測報告, 僅提供原始測試報告.
7. SLIGHT DEFORMED IS NORMAL STATUS.
輕微變形為正常現象.

PART NO.	AXIS COLOR	TORQUE
DP028A(75)	BLUE	$75 \pm 20 \text{ gf/cm}$
DP028A(250)	WHITE	$250 \pm 30 \text{ gf/cm}$

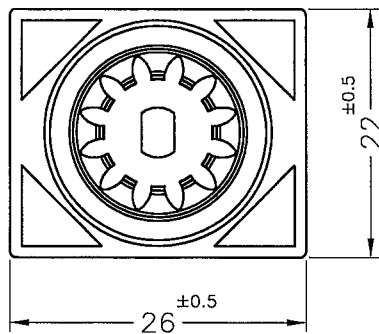

康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

康揚塑膠五金(泰國)有限公司

บริษัท คง ยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด
KANG YANG HARDWARE (THAILAND) CO., LTD.

康揚越南有限公司

CÔNG TY TNHH KANG YANG VIỆT NAM
KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2015.07.27	TITLE DAMPER GEAR	DWG. NO. DP028A		PART NO. SEE ABOVE	
	DRAWN H.W.	BODY MATERIAL / COLOR ABS UL94HB / BLACK	SIZE A4		SPEC. DWG	
	CHECKED Kenny	GEAR MATERIAL / COLOR POM UL94HB / BLACK				
	APPROVED Kang	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	SCALE: 3:2		UNIT mm	REV B SHEET 1 OF 1