
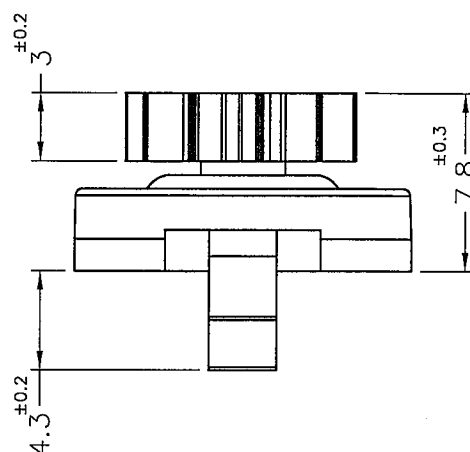
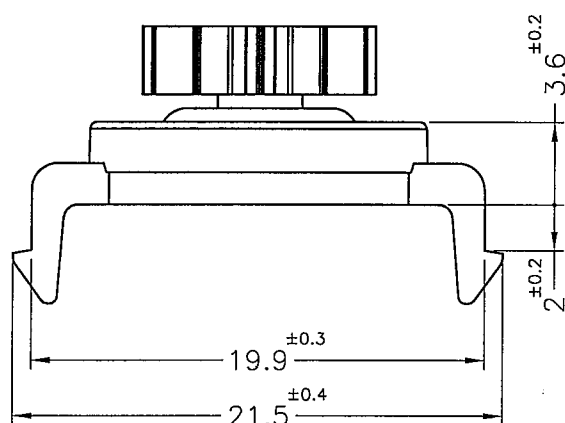
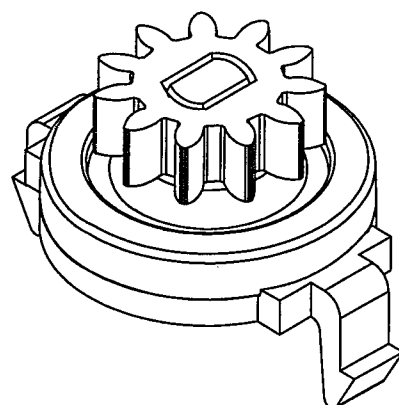


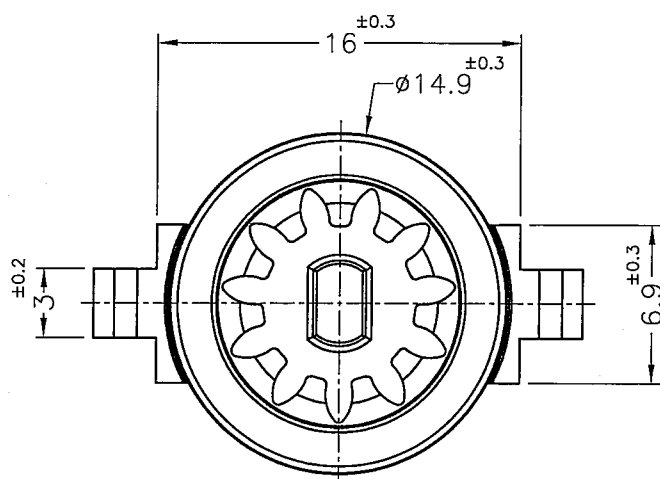

NOTE: 1. MODULUS(模數): 0.8

2. PITCH DIAMETER(節圓直徑): $\phi 8.8$

3. NUMBER OF TEETH(齒數): 11

4. PRESSURE ANGLE(壓力角): 20°

5. TORQUE(扭力): SEE ABOVE

6. PLACE IN ROOM TEMPERATURE, THE TORQUE AT 20rpm/min SHALL BE WITHIN UPPER TABLE.

標準室溫底下, 20轉/分鐘 扭力須符合上表.

7. SPECIAL COMMENTS(特別條件)

7-1 "ROOM TEMPERATURE" IN THIS DRAWING MEANS THE SAME DEFINED.

(TEMPERATURE: $23 \pm 2^\circ \text{C}$, RELATIVE HUMIDITY: $50 \pm 10\%$)

圖面上指的室溫為 $23 \pm 2^\circ \text{C}$, 濕度 $50 \pm 10\%$

7-2 TORQUE WILL BE CHANGED BY TEMPERATURE AND RPM.

扭力會隨溫度及轉速而有所差異.

8. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質

9. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.

色母環保檢測報告, 僅提供原始測試報告.

PART NO.	TORQUE
DP017A(90)	90 ± 20 gf/cm
DP017A(120)	120 ± 20 gf/cm
DP017A(150)	150 ± 20 gf/cm
DP017A(170)	170 ± 20 gf/cm



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN)CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE PROPERTY
OF KANG YANG HARDWARE
ENTERPRISE CO. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF
KANG YANG HARDWARE ENTERPRISE
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE

2013.04.22

DRAWN

K.W

CHECKED

林祺翔

APPROVED

Kang

TITLE

DAMPER GEAR

BODY MATERIAL/COLOR

ABS UL94HB/BLACK

GEAR MATERIAL/COLOR

POM UL94HB/BLACK

AXIS MATERIAL/COLOR

N66 UL94V-2/RED

UNLESS OTHERWISE SPECIFIED

TOLERANCE:

SEE ABOVE

DWG. NO.

DP017A

PART NO.

SEE ABOVE

SIZE

A4

SPEC. DWG.

REV

C

SCALE: 3:1

UNIT

mm

SHEET 1 OF 1