


REVISIONS			
REV	DESCRIPTION	DATE	BY

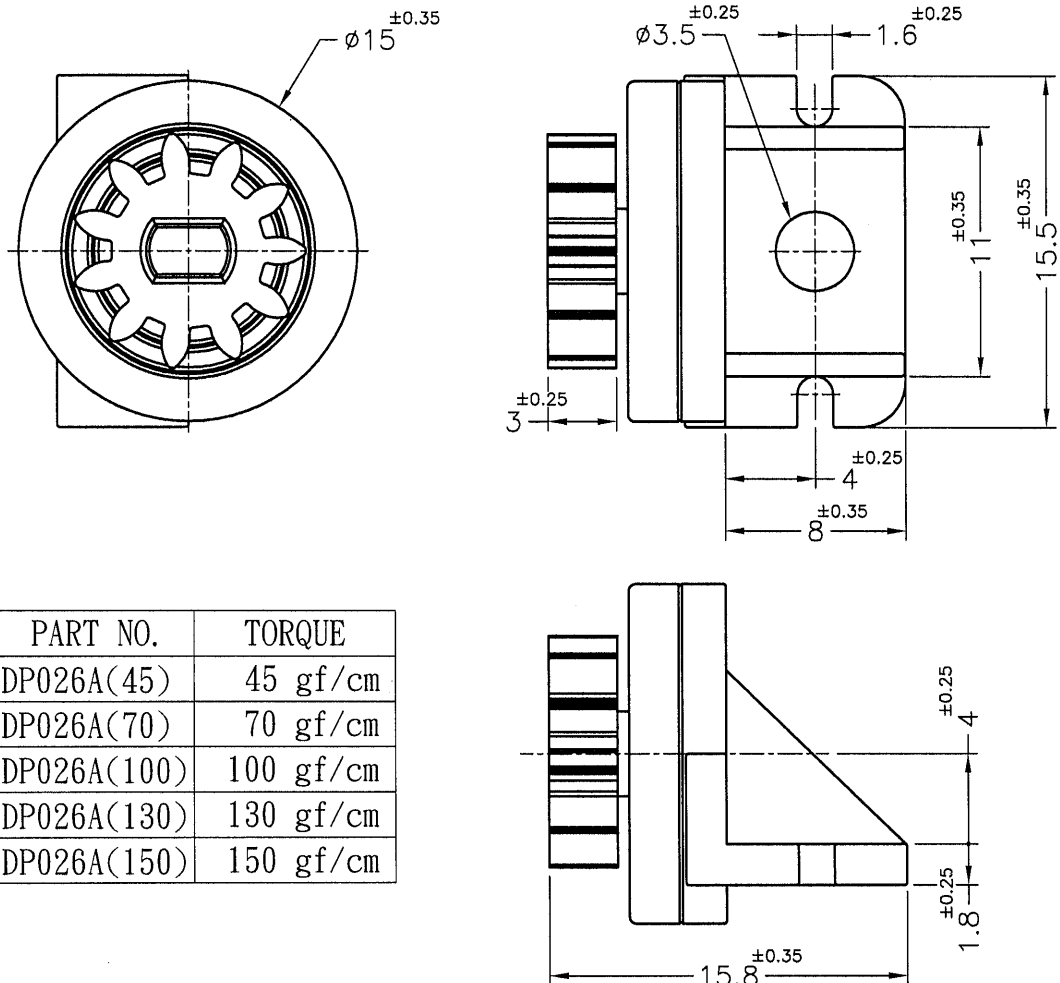

PART NO.	TORQUE
DP026A(45)	45 gf/cm
DP026A(70)	70 gf/cm
DP026A(100)	100 gf/cm
DP026A(130)	130 gf/cm
DP026A(150)	150 gf/cm

NOTE: 1. MODULE(模數): 0.8

2. PITCH CIRCLE DIAMETER(節圓直徑): $\phi 8.8$

3. NO. OF TEETH(齒數): 11

4. PRESSURE ANGLE(壓力角): 20°

5. TORQUE(扭力): SEE ABOVE TABLE(表格)

6. SPECIAL COMMENTS(特別條件)

6-1 "ROOM TEMPERATURE" IN THIS DRAWING MEANS THE SAME DEFINED.
(TEMPERATURE: $23 \pm 2^\circ \text{C}$, RELATIVE HUMIDITY: $50 \pm 10\%$)

圖面上指的室溫為 $23 \pm 2^\circ \text{C}$, 濕度 $50 \pm 10\%$

6-2 TORQUE WILL BE CHANGED BY TEMPERATURE AND RPM.

扭力會隨溫度及轉速而有所差異.

7. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE DAMPER GEAR		SPEC. DWG.	
				BODY MATERIAL/COLOR ABS UL94HB/BLACK		DATE 2015.05.12	
				GEAR MATERIAL/COLOR POM UL94HB/BLACK		DRAWN K.W	
				AXIS MATERIAL/COLOR NYLON 66 UL94V-2/RED		CHECK 	
PART NUMBER SEE ABOVE		DRAWING NUMBER DP026A		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
SIZE A4	SCALE 2:1	UNIT mm	REV B				