
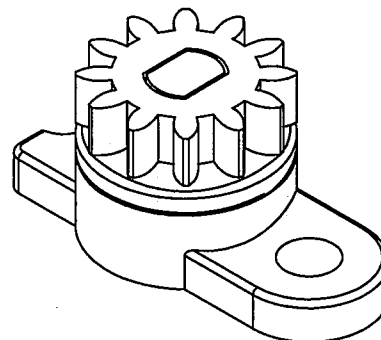


RECOMMEND MOUNTING LAYOUT

- NOTE: 1. MODULUS(模數): 0.5
 2. PITCH DIAMETER(節圓直徑): $\phi 6.0$
 3. NUMBER OF TEETH(齒數): 12
 4. PRESSURE ANGLE(壓力角): 20°
 5. TORSION(扭力): 20 ± 10 gf/cm
 6. PLACE IN ROOM TEMPERATURE, THE TORQUE AT 20rpm/min SHALL BE WITHIN UPPER TABLE.
 標準室溫底下, 20轉/分鐘 扭力須符合上表.
 7. SPECIAL COMMENTS(特別條件)
 7-1 " ROOM TEMPERATURE " IN THIS DRAWING MEANS THE SAME DEFINED.
 (TEMPERATURE: $23 \pm 2^\circ$ C, RELATIVE HUMIDITY: $50 \pm 10\%$)
 圖面上指的室溫為 $23 \pm 2^\circ$ C, 濕度 $50 \pm 10\%$
 7-2 TORQUE WILL BE CHANGED BY TEMPERATURE AND RPM.
 扭力會隨溫度及轉速而有所差異.
 8. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.
 色母環保檢測報告, 僅提供原始測試報告.
 9. MADE OF EQUIVALENT MATERIAL.
 均可使用同等材質

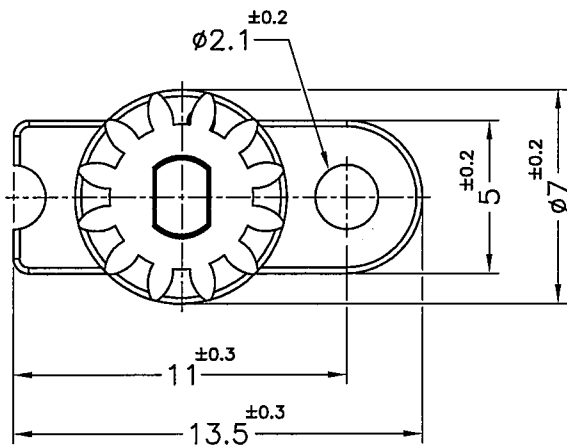

康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
 康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
 康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	2017.09.12	TITLE	DAMPER	DWG. NO.	DP032A	PART NO.	DP032A(20)
	DRAWN	Shean	BODY MATERIAL / COLOR	ABS UL94HB / BLACK	SIZE	A4	SPEC. DWG	REV
	CHECKED	Kenny	GEAR MATERIAL / COLOR	POM UL94HB / BLACK	SCALE: 4:1	UNIT	mm	SHEET 1 OF 1
	APPROVED	Kang	UNLESS OTHERWISE SPECIFIED TOLERANCE:	SEE ABOVE				