

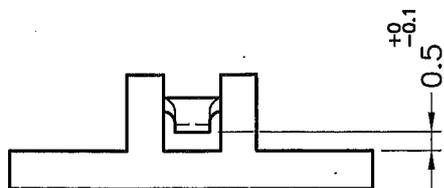


成型尺寸	公差
5mm 以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm 以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

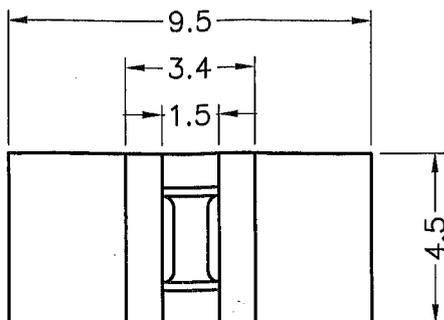

QMFZ2 Component - Plastics

Friday, October 24, 2003

E235269

NAN YA PLASTICS (HUI ZHOU) CORP LTD

YONGSHI DA DAO SHI WAN TOWN HUIZHOU GUANGDONG CHINA

Material Designation: 1403G3

Product Description: Polybutylene Terephthalate (PBT), furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	4	0	130	130	140	-	-
	1.5	V-0	3	0	130	130	140	-	-
	3	V-0	2	0	130	130	140	-	-
CTI: 3		HVTR: 2		D495: 6		IEC Ball Pressure (C): -			

Dielectric Strength (kV/mm): -

Volume Resistivity (10¹⁰ohm-cm): -

Dimensional Stability(%): 0

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

Report Date: 4/23/2003

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULL.

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>		TITLE	電晶體座	產品規格圖面	
		MATERIAL	P.B.T UL94V-0+GF	DATE	2009.03.18
		FINISH		DRAWN	Eric
		COLOR	NATURAL	CHECK	
PART NUMBER	TR-26PV0	DRAWING NUMBER	TR-26	UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE
SIZE	A4	SCALE	5:1	UNIT	mm
REV	A	APPROVED			